


APP CRS	Rwy Idg	7569
235°	TDZE	726
	Apt Elev	727

RNAV (RNP) Z RWY 23

BUFFALO NIAGARA INTL (BUF)


RNP AR APCH.	ALSIF-2	MISSED APPROACH: Climb to 3000 on the RNAV missed approach route to WABUS and hold.
<p>▼ For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALSIF, increase RNP 0.10 all Cats visibility to 1½. For inop ALSF, increase RNP 0.20 all Cats visibility to 1½. For inop ALSF, increase RNP 0.30 all Cats visibility to 1½.</p>		

D-ATIS	BUFFALO APP CON	BUFFALO TOWER	GND CON	CLNC DEL	CPDLC
135.35	126.15 263.125	120.5 257.8	133.2 257.8	124.7 257.8	

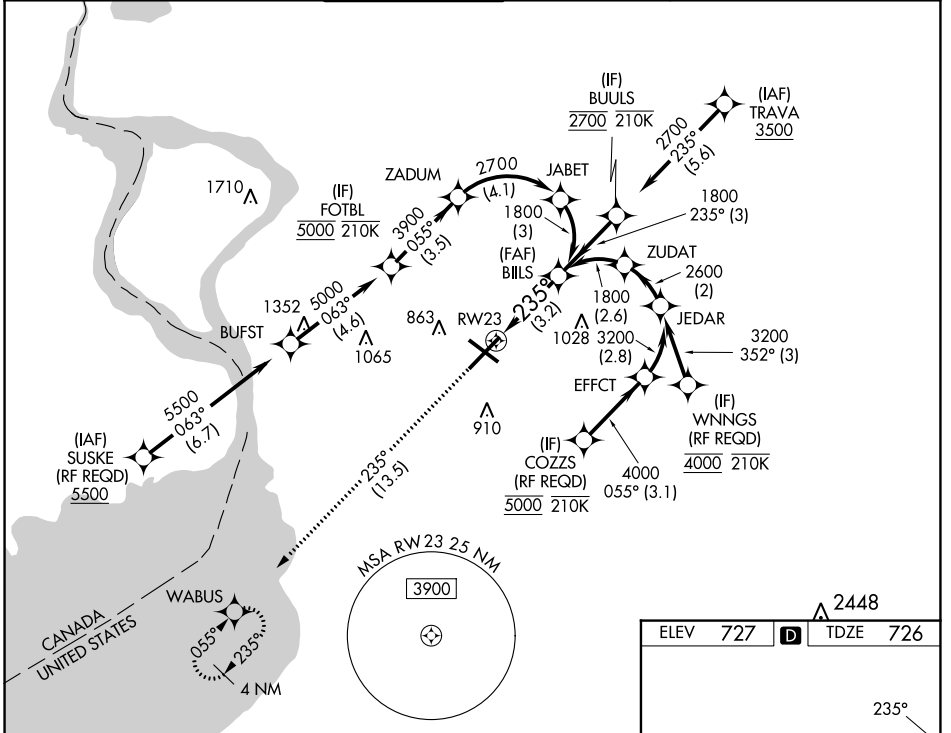

NE-2, 11 JUL 2024 to 08 AUG 2024

NE-2, 11 JUL 2024 to 08 AUG 2024

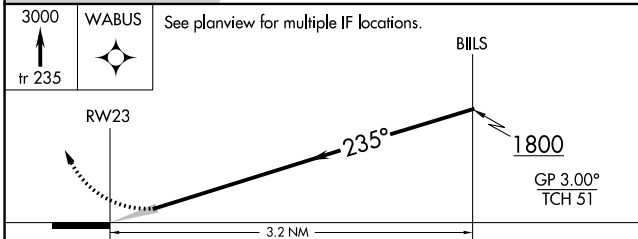

CATEGORY	A	B	C	D
RNP 0.10 DA		1114/45	388 (400-¾)	
RNP 0.20 DA		1170/55	444 (500-1)	
RNP 0.30 DA		1228-1¼	502 (600-1¼)	

AUTHORIZATION REQUIRED

