


RAMBL SIX DEPARTURE (RNAV)

TOP ALTITUDE:
Rwys 13L/R: 3000
Rwys 31L/R: 10000

D-ATIS
120.15
CLNC DEL
127.9
CPDLC
GND CON
121.75 348.6
LOVE TOWER
123.7 239.3
REGIONAL DEP CON
126.475 363.15

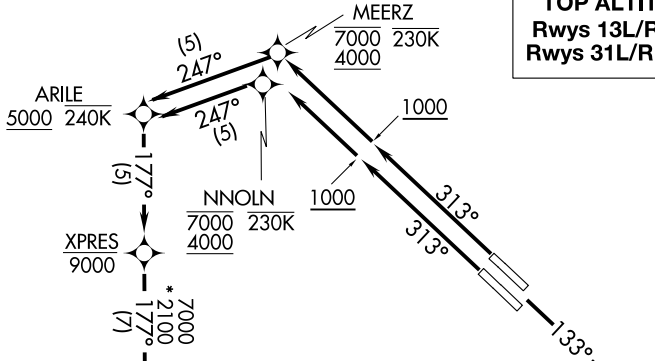


RAMBL 10000

TAKEOFF MINIMUMS

Rwys 13L/R: Standard with minimum climb of 500' per NM to 1200.
Rwys 31L/R: Standard with minimum climb of 500' per NM to 1000.

**RNAV 1 - DME/DME/IRU or GPS required.
RADAR required.**

NOTE: For use by turbojet aircraft only.
NOTE: PROPS: File and expect JOE POOL DEPARTURE.

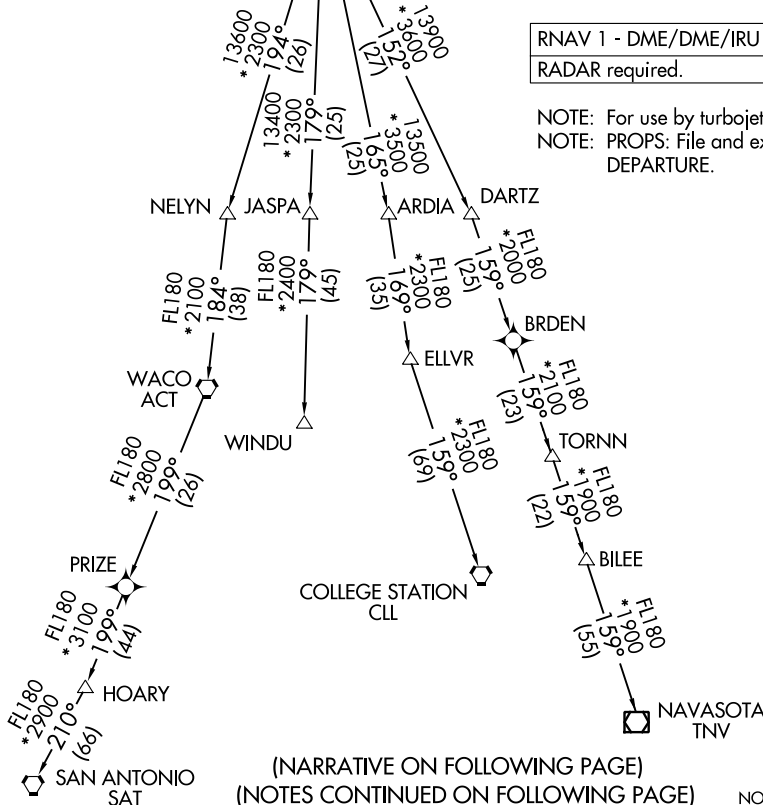

(NARRATIVE ON FOLLOWING PAGE)
(NOTES CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

RAMBL SIX DEPARTURE (RNAV)