

NIKE FIVE DEPARTURE (RNAV)

SE-1, 11 JUL 2024 to 08 AUG 2024

D-ATIS
127.75
CLNC DEL
125.2
CPDIC
GND CON

121.0 379.2 (Rwy 9-27)
121.9 379.2 (Rwys 18C-36C, 18I-36R)
121.65 379.2 (Rwy 18R-36I)
MEMPHIS TOWER

118.3 257.8 (Rwy 9-27)
119.7 257.8 (Rwys 18C-36C, 18I-36R)
128.425 257.8 (Rwy 18R-36I)
MEMPHIS DEP CON
124.65 284.7

**TOP ALTITUDE:
5000**

TAKEOFF MINIMUMS:

Rwys 9, 18L/C/R, 27, 36L/C/R: Standard
with minimum climb of 500' per NM to 860.

INAYO
*9600
1800
305°
(2)

NIKEI

*2200
1800
305°
(5)

LRNCE

296°
(33)

BEEAL

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: Turbojets only.

NOTE: Takeoff Rwys 18L/C/R, 36L/C/R:
Radar required for non-GPS equipped aircraft.


NOTE: Takeoff Rwys 9, 27: Radar required.

NOTE: Transponder code will be issued via PDC or Memphis
clearance delivery.

NOTE: Accelerate to 250K, reaching 10000 MSL, maintain
250K or greater, if unable advise ATC.

NOTE: Procedure authorized 0200-0600 local only.

NOTE: If unable to accept climb rates, advise ATC
on initial contact.

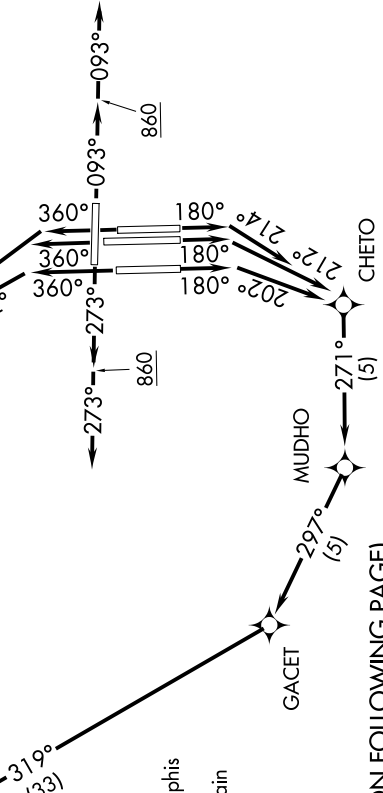

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

SE-1, 11 JUL 2024 to 08 AUG 2024

NIKE FIVE DEPARTURE (RNAV)