RNAV (GPS) RWY 10R

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

WAAS CH 63236 W10B	APP CRS 096°	Rwy Idg 8000 TDZE 14 Apt Elev 65

RNP APCH-GPS.

LNAV procedure NA during simultaneous operations. Rwy 10R helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7° C or above 54° C. For inop ALS, increase LNAV Cats C and D visibility to 1⅜ SM. Use of FD or AP required during simultaneous operations

MALSF

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct ULSUZ and hold.

D-ATIS	MIAMI APP CON	FORT LAUDERDALE TOWER	GND CON	CLNC DEL	CPDLC
135.0	133.775 285.6	119.3 257.8	121.4	128.4	

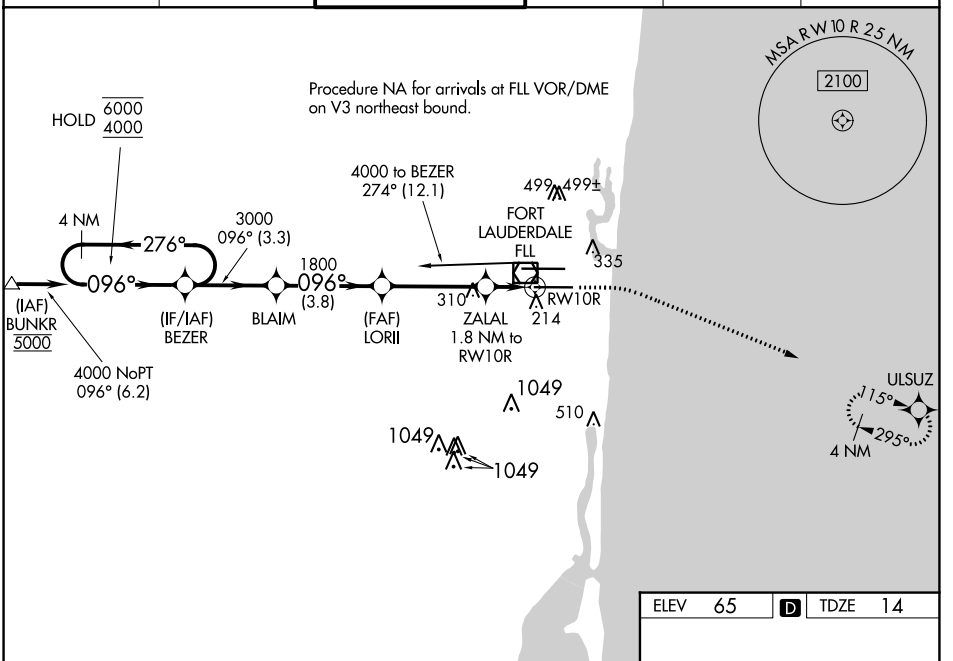

SE-3, 11 JUL 2024 to 08 AUG 2024

SE-3, 11 JUL 2024 to 08 AUG 2024

ELEV 65 | D | TDZE 14

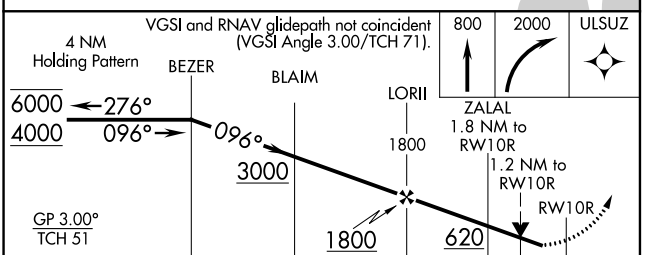



CATEGORY	A	B	C	D
LPV DA	264/40	250 (200-¾)		
LNAV/VNAV DA	355/40	341 (300-¾)		
LNAV MDA	460/40	446 (400-¾)	460/55	446 (400-1)
C CIRCLING	680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)

HIRL Rwy 10L-28R and 10R-28L