

|  |                        |                             |                                       |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>90430</b><br><b>W18B</b> | APP CRS<br><b>178°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5949</b><br><b>34</b><br><b>36</b> |
|--|------------------------|-----------------------------|---------------------------------------|

# RNAV (GPS) RWY 18L


VALLEY INTL (HRL)

RNP APCH - GPS.

**⚠** Baro-VNAV and VDP NA when using Port Isabel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. When local altimeter setting not received, use Port Isabel altimeter setting; increase LPV DA to 276 feet; increase LNAV/VNAV DA to 326 feet and all visibilities 1/8 SM; increase all MDAs 60 feet and LNAV visibility Cats C and D 1/8 SM, and Circling visibility Cat C and D 1/4 SM.

**MISSED APPROACH:**  
Climb to 500 then climbing left turn to 2000 direct RELAX and hold.



|                       |                                      |  |                         |                         |
|-----------------------|--------------------------------------|--|-------------------------|-------------------------|
| ATIS<br><b>124.85</b> | VALLEY APP CON<br><b>120.7 279.5</b> | HARLINGEN TOWER ★<br><b>119.3 (CTAF) 0 317.6</b> | GND CON<br><b>121.7</b> | UNICOM<br><b>122.95</b> |
|-----------------------|--------------------------------------|--|-------------------------|-------------------------|

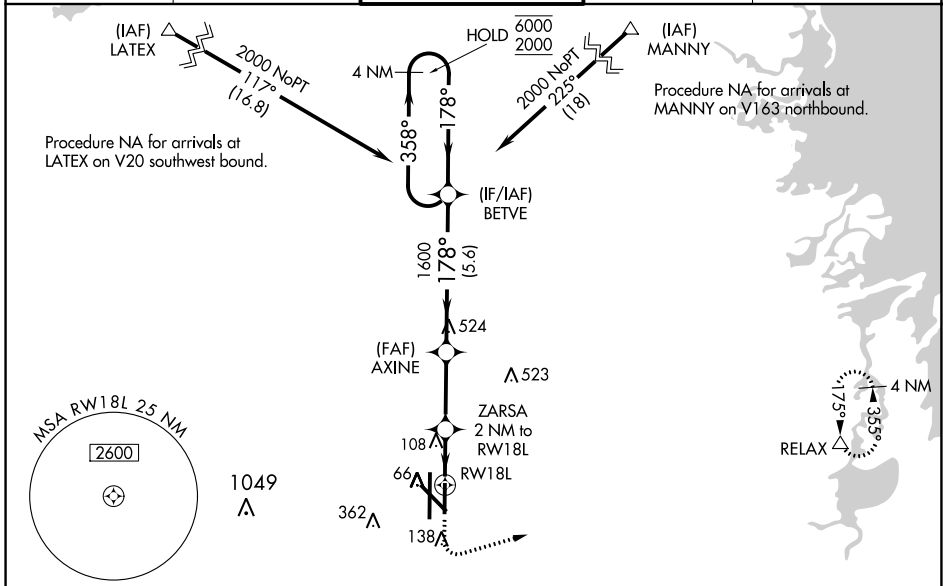

SC-3, 11 JUL 2024 to 08 AUG 2024

SC-3, 11 JUL 2024 to 08 AUG 2024

|         |          |         |
|---------|----------|---------|
| ELEV 36 | <b>D</b> | TDZE 34 |
|---------|----------|---------|

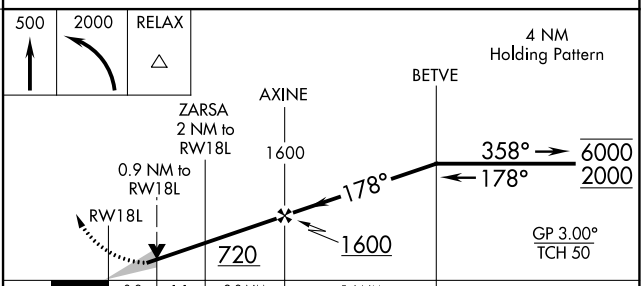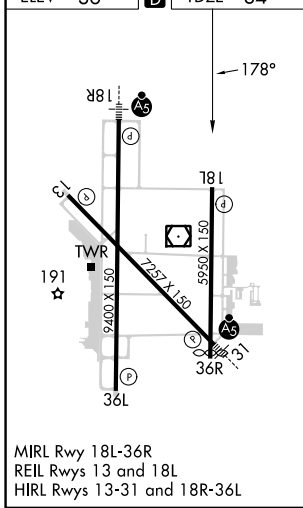

| CATEGORY          | A                    | B                    | C                            | D                    |
|-------------------|----------------------|----------------------|------------------------------|----------------------|
| LPV DA            |                      | 234-3/4              | 200 (200-3/4)                |                      |
| LNAV/VNAV DA      |                      | 284-3/4              | 250 (300-3/4)                |                      |
| LNAV MDA          |                      | 360-1                | 326 (400-1)                  |                      |
| <b>C</b> CIRCLING | 460-1<br>424 (500-1) | 560-1<br>524 (600-1) | 600-1 1/2<br>564 (600-1 1/2) | 680-2<br>644 (700-2) |