
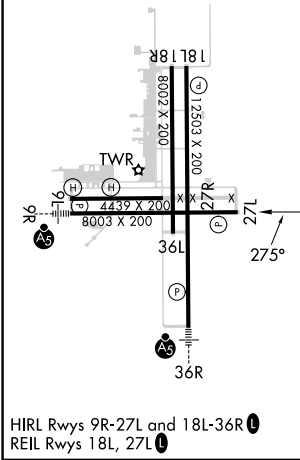


WAAS CH 97716 W27A	APP CRS 275°	Rwy Idg TDZE Apt Elev	8003 72 80
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 27L

CECIL (VQQ)

RNP APCH.		CECIL TOWER★		GND CON		CLNC DEL		GCO	
Rwy 27L helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C.		126.1 (CTAF) 0 235.625		121.625 226.675		123.975 254.25		135.075	
ATIS	JACKSONVILLE APP CON	CECIL TOWER★		GND CON		CLNC DEL		GCO	
125.275	127.775 377.075	126.1 (CTAF) 0 235.625		121.625 226.675		123.975 254.25		135.075	

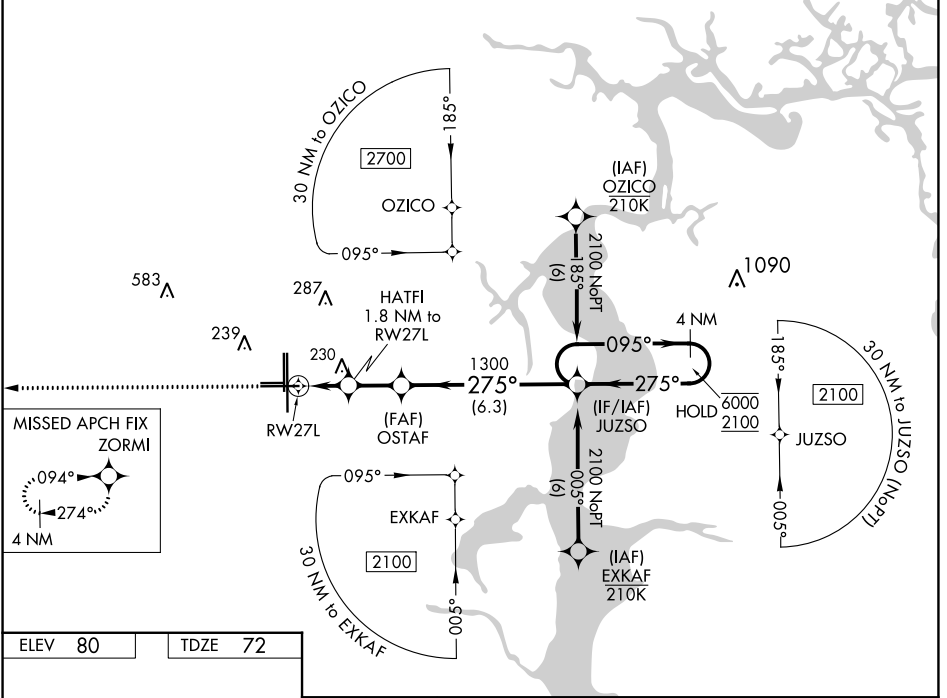

ELEV 80	TDZE 72	VGSi and RNAV glidepath not coincident (VGSi 3.00 Angle/TCH 67).		4 NM Holding Pattern																									
ZORMI		RNAV only.																											
				GP 3.00° TCH 50																									
<table border="1"> <tr> <th>CATEGORY</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> <tr> <td>LPV DA</td> <td></td> <td>393-1</td> <td>321 (400-1)</td> <td></td> </tr> <tr> <td>LNAV/ VNAV DA</td> <td></td> <td>451-1</td> <td>379 (400-1)</td> <td></td> </tr> <tr> <td>LNAV MDA</td> <td>540-1</td> <td>468 (500-1)</td> <td>540-1 3/8</td> <td>468 (500-1 3/8)</td> </tr> <tr> <td> CIRCLING</td> <td>540-1 460 (500-1)</td> <td>560-1 480 (500-1)</td> <td>600-1 1/2 520 (600-1 1/2)</td> <td>640-2 560 (600-2)</td> </tr> </table>	CATEGORY	A	B	C	D	LPV DA		393-1	321 (400-1)		LNAV/ VNAV DA		451-1	379 (400-1)		LNAV MDA	540-1	468 (500-1)	540-1 3/8	468 (500-1 3/8)	CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1 1/2 520 (600-1 1/2)	640-2 560 (600-2)				
CATEGORY	A	B	C	D																									
LPV DA		393-1	321 (400-1)																										
LNAV/ VNAV DA		451-1	379 (400-1)																										
LNAV MDA	540-1	468 (500-1)	540-1 3/8	468 (500-1 3/8)																									
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1 1/2 520 (600-1 1/2)	640-2 560 (600-2)																									

SE-3, 11 JUL 2024 to 08 AUG 2024

SE-3, 11 JUL 2024 to 08 AUG 2024