

# ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 11 JUL 2024 to 08 AUG 2024

D-ATIS 119.95  
 CLNC DEL 121.85 (when tower closed)  
 GND CON 121.85  
 COUNTY TOWER \* 118.5 (CTAF)  
 CLEVELAND DEP CON 125.35 346.325

### TAKEOFF MINIMUMS:

Rwys 6, 24: Standard with a minimum climb of 500' per NM to 1400.



### TOP ALTITUDE: ASSIGNED BY ATC

NOTE: RADAR required.

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: PUUJL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

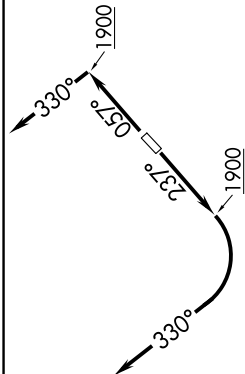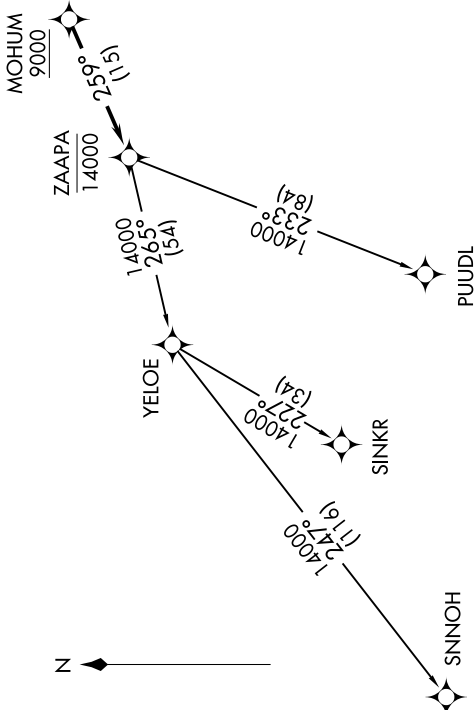

### DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAY 6:** Climb on heading 057° to 1900, then on heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....  
**TAKEOFF RUNWAY 24:** Climb on heading 237° to 1900, then right turn heading 330° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

- PUUJL TRANSITION (ZAAPA5.PUUJL)
- SINKR TRANSITION (ZAAPA5.SINKR)
- SNNOH TRANSITION (ZAAPA5.SNNOH)

NOTE: Chart not to scale.

EC-2, 11 JUL 2024 to 08 AUG 2024

# ZAAPA FIVE DEPARTURE (RNAV)