| APP CRS | Rwy Idg | 7510 |
|---|---|---|
| 312° | TDZE | 43 |
| | Apt Elev | 46 |

# RNAV (RNP) Z RWY 31

## CORPUS CHRISTI INTL (CRP)

For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS and RF required. For inop MALSR, increase RNP 0.14 all Cats visibility to ⅞ mile.
*Missed approach requires minimum climb of 335 feet per NM to 500.

MALSR

MISSED APPROACH: Climb to 2000 on track 312° to ATHIS and hold.

| ATIS | CORPUS APP CON | CORPUS TOWER | GND CON | CLNC DEL |
|---|---|---|---|---|
| 126.8 | 120.9 348.725 | 119.4 257.8 | 121.9 269.15 | 118.55 |

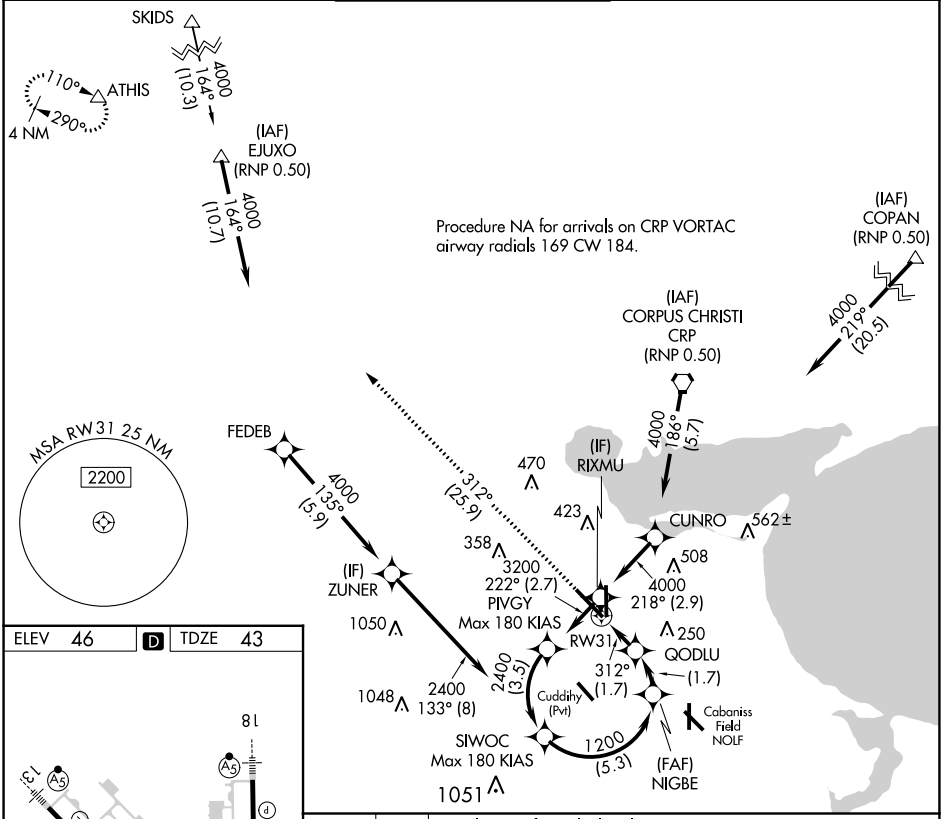


ELEV 46 | D | TDZE 43

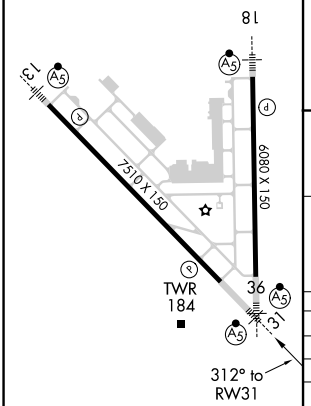


HIRL Rwys 13-31 and 18-36

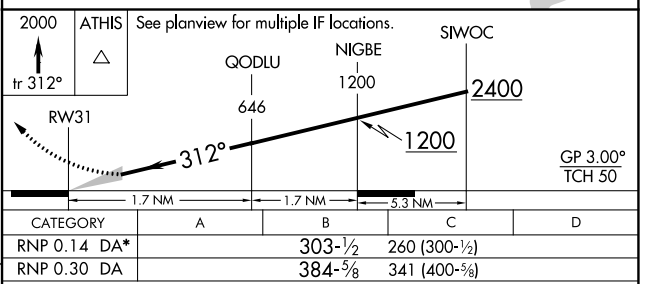


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.14 DA* | | 303-½ | 260 (300-½) | |
| RNP 0.30 DA | | 384-⅝ | 341 (400-⅝) | |

## AUTHORIZATION REQUIRED



SC-3, 11 JUL 2024 to 08 AUG 2024
SC-3, 11 JUL 2024 to 08 AUG 2024