WAAS	APP CRS	Rwy Idg	5503
CH 97709	089°	TDZE	385
W09A		Apt Elev	387

RNAV (GPS) RWY 9
HENDERSON CITY-COUNTY (EHR)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48° C. Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Evansville altimeter setting. When local altimeter setting not received, use Evansville altimeter setting and increase all DA 41 feet and all MDA 60 feet and LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C/D visibilities ¼ mile.

MISSED APPROACH: Climb to 2500 direct ONZIG and hold.

AWOS-3PT	EVANSVILLE APP CON ★	UNICOM
118.85	124.025 257.8	122.8 (CTAF) L

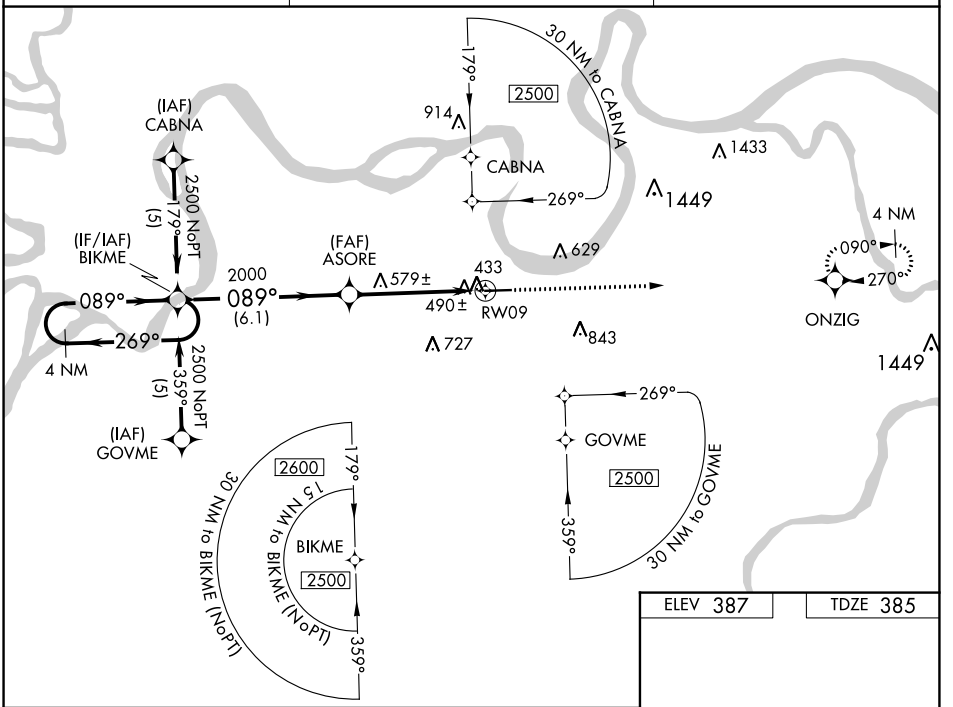

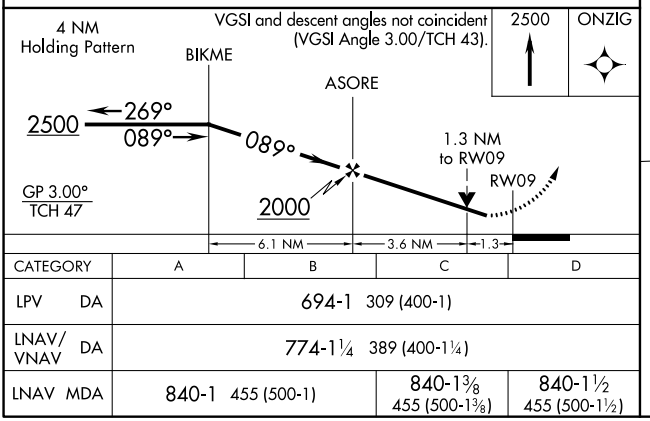

ELEV 387 TDZE 385



CATEGORY	A	B	C	D
LPV DA	694-1 309 (400-1)			
LNAV/VNAV DA	774-1¼ 389 (400-1¼)			
LNAV MDA	840-1 455 (500-1)		840-1⅜ 455 (500-1⅜)	840-1½ 455 (500-1½)

REIL Rwys 9 and 27 L
MIRL Rwy 9-27 L

SE-1, 11 JUL 2024 to 08 AUG 2024
SE-1, 11 JUL 2024 to 08 AUG 2024