

VOR/DME SWO 108.4 Chan 21	APP CRS 356°	Rwy Idg 7401 TDZE 966 Apt Elev 1000
----------------------------------------	------------------------	----------------------------------------------------------------



VOR/DME RWY 35

STILLWATER RGNL (SWO)


⚠ When local altimeter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet; S-35 Cats C/D visibility ¼ mile; Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting.

MISSED APPROACH: Climb to 2600 direct SWO VOR/DME and hold.

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	------------------------------------------	----------------------------------------------	-------------------------	-------------------------

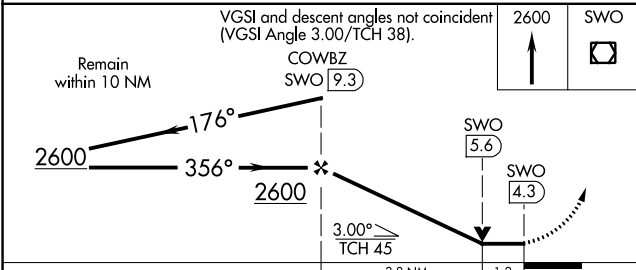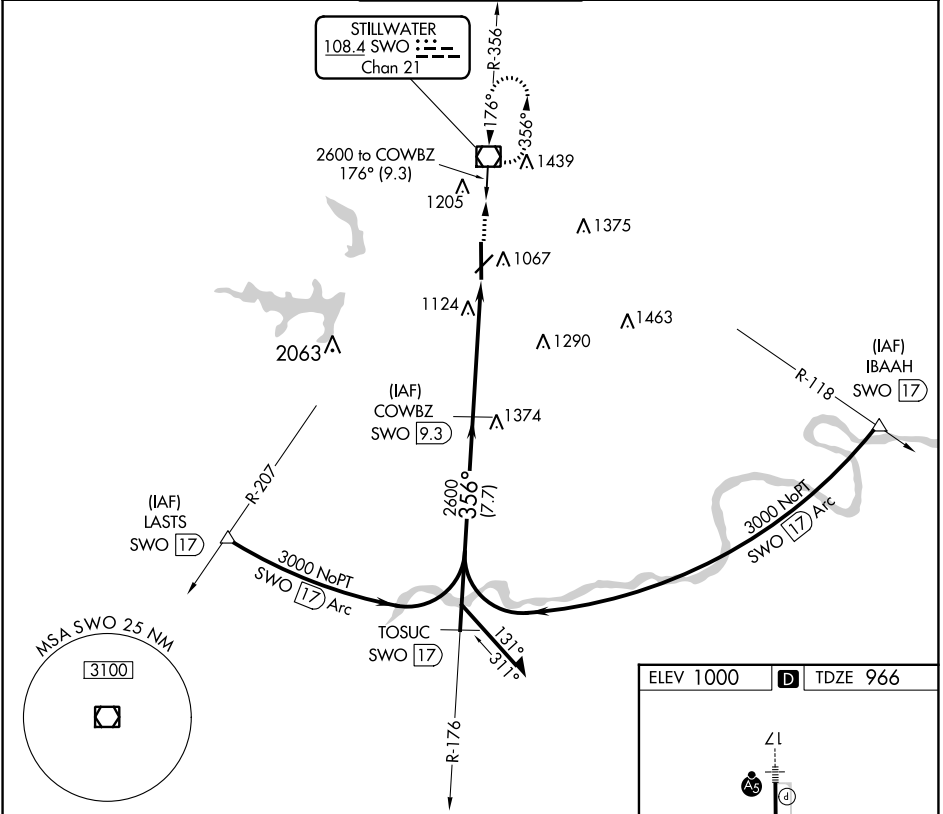

ELEV 1000	D	TDZE 966
-----------	---	----------

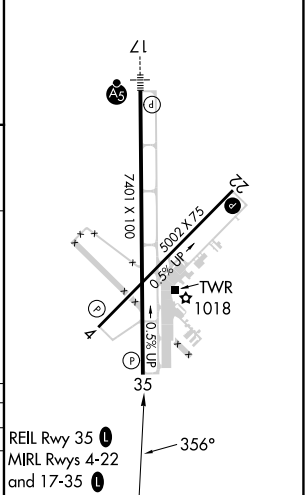

CATEGORY	A	B	C	D
S-35	1380-1	414 (400-1)	1380-1¼	414 (400-1¼)
CIRCLING	1420-1 420 (500-1)	1460-1 460 (500-1)	1520-1½ 520 (600-1½)	1740-2¼ 740 (800-2¼)

REIL Rwy 35 0
MIRL Rwy 4-22 and 17-35 0

SC-1, 11 JUL 2024 to 08 AUG 2024

SC-1, 11 JUL 2024 to 08 AUG 2024