


**TOP ALTITUDE:
 3000**


ATIS
 132.4
 GND CON
 121.65
 WAUKEGAN TOWER★
 120.05 273.55
 DEP CON
 120.55



TAKEOFF MINIMUMS

Rwys 5, 32: Standard with minimum climb of 500' per NM to 1240.
 Rwys 14, 23: Standard with minimum climb of 500' per NM to 1230.

- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: TURBOJET departures maintain 250K until advised by ATC.
- NOTE: EMMLY transition: For aircraft inbound to Indianapolis Terminal area, or as assigned by ATC.
- NOTE: ELANR transition: For aircraft inbound to Cincinnati Terminal area, or as assigned by ATC.

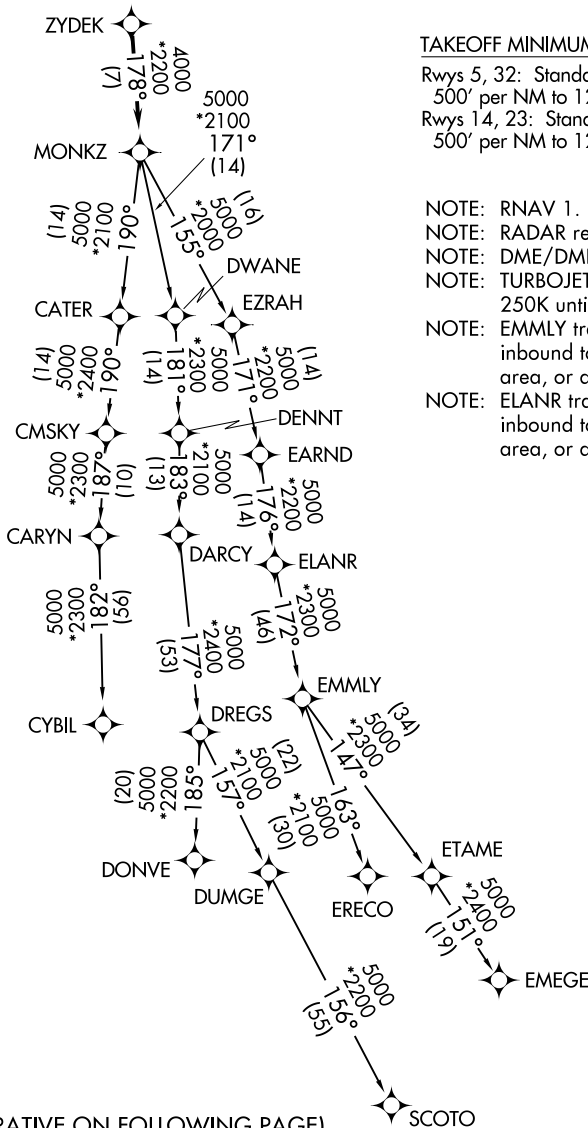

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.