

LOC/DME I-PGV <b>110.7</b> Chan <b>44</b>	APP CRS <b>197°</b>	Rwy Idg <b>6505</b> TDZE <b>25</b> Apt Elev <b>26</b>
---	------------------------	---



# ILS Y or LOC Y RWY 20

PITT-GREENVILLE (PGV)

**ADF required.** VDP NA with Washington altimeter setting. When local altimeter setting not received use Washington altimeter setting and increase S-ILS 20 DA to 298 feet; increase all MDAs 60 feet and S-LOC 20 visibility Cat C/D 1/4 SM, and Circling visibility Cat D 1/4 SM. For inop ALS when using Washington altimeter setting, increase S-ILS 20 all Cats visibility 3/8 SM, and S-LOC 20 visibility Cat A/B 1/4 SM. Inop table does not apply to S-ILS all Cats. Rwy 20 helicopter visibility reduction below 3/4 SM NA. For inop ALS, increase S-LOC 20 visibility Cat A/B 1/4 SM, Cat C/D 3/8 SM.

**MALSR** MISSED APPROACH: Climb to 800 then climbing right turn to 1600 direct AGE NDB and hold.

AWOS-3 <b>128.425</b>	WASHINGTON CENTER <b>123.85 279.65</b>	UNICOM <b>122.8 (CTAF) 1</b>
--------------------------	---	---------------------------------

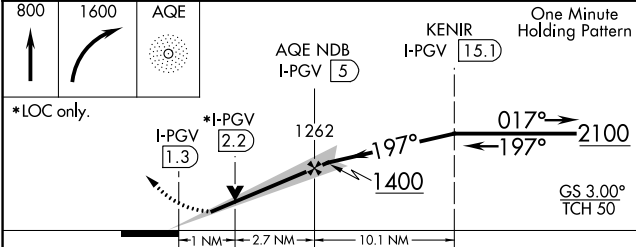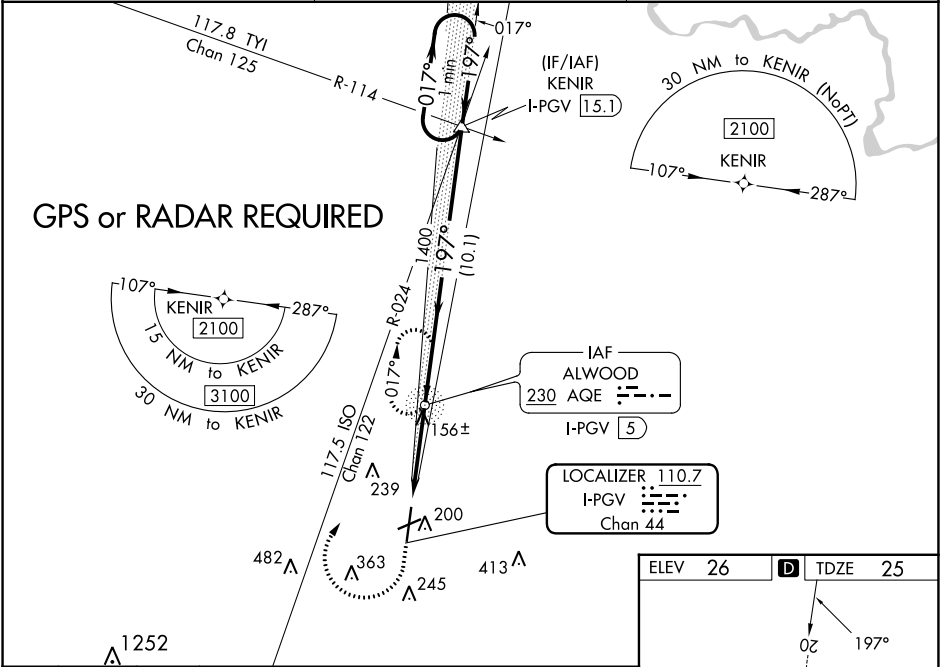

CATEGORY	A	B	C	D
S-ILS 20		257-3/4	231 (300-3/4)	
S-LOC 20		420-3/4	394 (400-3/4)	
<b>CIRCLING</b>	600-1 574 (600-1)	620-1 594 (600-1)	700-2 674 (700-2)	800-2 1/2 774 (800-2 1/2)

ELEV 26	<b>D</b>	TDZE 25
---------	----------	---------

197°  
20  
A5  
d  
7175 X 150  
A997 X 150  
e  
8  
p  
2  
HIRL Rwy 2-20 1  
MIRL Rwy 8-26 1  
REIL Rws 2, 8, and 26

FAF to MAP 3.7 NM					
Knots	60	90	120	150	180
Min:Sec	3:42	2:28	1:51	1:29	1:14

SE-2, 11 JUL 2024 to 08 AUG 2024

SE-2, 11 JUL 2024 to 08 AUG 2024