

WAAS CH <b>42636</b> <b>W30A</b>	APP CRS <b>306°</b>	Rwy Idg TDZE Apt Elev	<b>4000</b> <b>543</b> <b>547</b>
--	------------------------	-----------------------------	---



# RNAV (GPS) RWY 30

MUSCATINE MUNI (MUT)

**▼** DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. VDP and Baro-VNAV NA with Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting and increase all DA 76 feet and all MDA 80 feet, increase LNAV/VNAV all Cats visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

**MISSED APPROACH:** Climb to 2600 direct YEBTY and hold.

AWOS-3P <b>120.625</b>	QUAD CITY APP CON * <b>133.275 257.8</b>	CLNC DEL <b>119.125</b>	UNICOM <b>122.7 (CTAF) 0</b>
---------------------------	---	----------------------------	---------------------------------

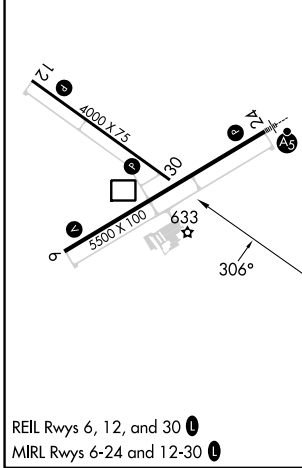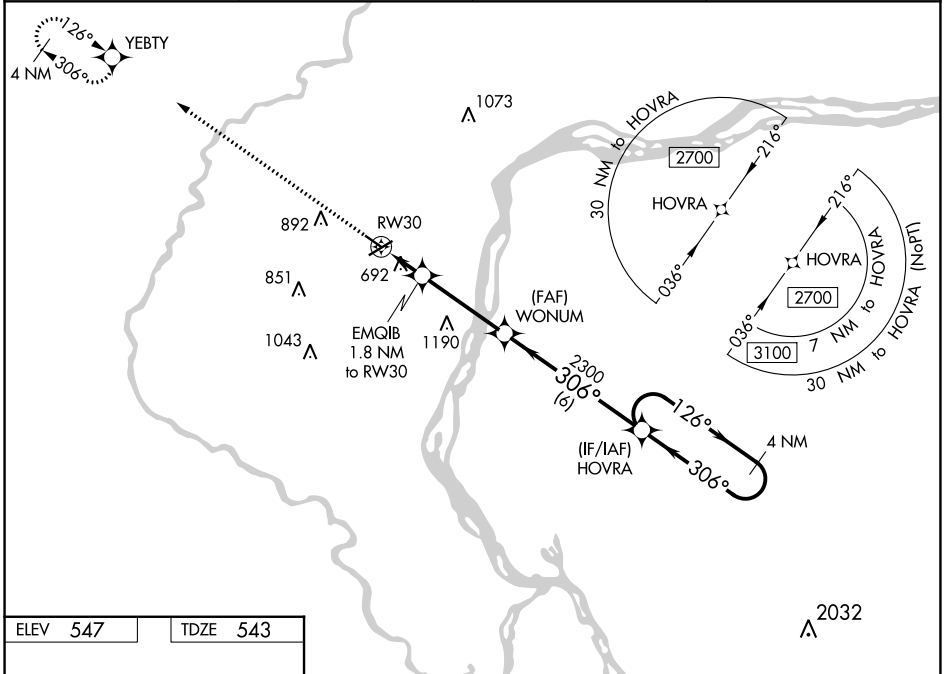

2600	YEBTY	EMQIB 1.8 NM to RW30	WONUM 2300	HOVRA 2700	4 NM Holding Pattern
* LNAV only		* 1.2 NM to RW30	1140*	2300	GP 3.00° TCH 40
1.2 NM		0.6	3.6 NM	6 NM	
CATEGORY	A	B	C	D	
LPV DA	743-1	200 (200-1)		NA	
LNAV/VNAV DA	989-1½	446 (500-1½)		NA	
LNAV MDA	960-1	417 (500-1)		NA	
<b>C</b> CIRCLING	1000-1	1200-1		NA	
	453 (500-1)	653 (700-1)			

NC-3, 11 JUL 2024 to 08 AUG 2024

NC-3, 11 JUL 2024 to 08 AUG 2024