RNAV (GPS) RWY 33

MANKATO RGNL (MKT)

WAAS	APP CRS		
CH **86315**	**335°**	Rwy Idg	**6600**
W33A		TDZE	**1021**
		Apt Elev	**1021**

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM and LNAV Cats C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 2700 direct HIBOG and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.175	**135.0 306.9**	**122.725** (CTAF) L

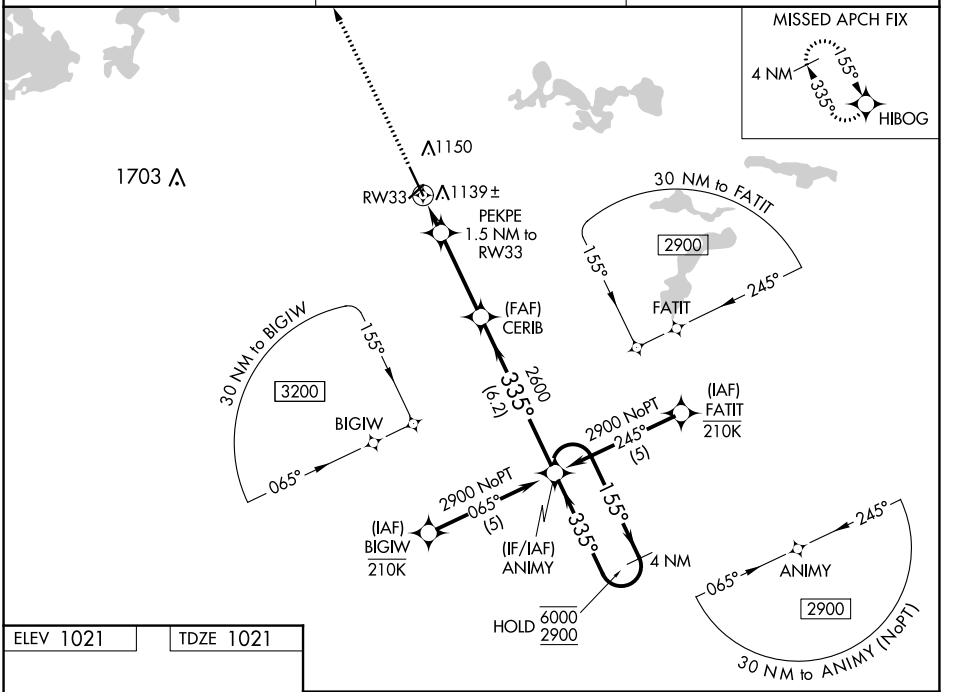

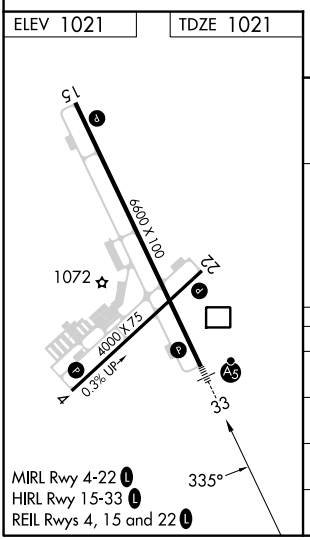

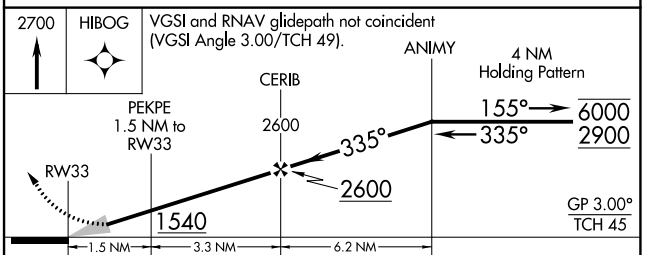

CATEGORY	A	B	C	D
LPV DA	1221-½ 200 (200-½)			
LNAV/VNAV DA	1320-½ 299 (300-½)			
LNAV MDA	1400-½ 379 (400-½)		1400-⅝ 379 (400-⅝)	
CIRCLING	1460-1 439 (500-1)	1480-1 459 (500-1)	1600-1½ 579 (600-1½)	1600-2 579 (600-2)

NC-1, 11 JUL 2024 to 08 AUG 2024
NC-1, 11 JUL 2024 to 08 AUG 2024