



WAAS CH 70723 W30A	APP CRS 300°	Rwy Idg 4100 TDZE 1222 Apt Elev 1226
--	------------------------	---

RNAV (GPS) RWY 30

POCAHONTAS MUNI (POH)

RNP APCH.	▼ NA Circling NA to Rws 18 and 36. Circling Rwy 12 NA at night. Rwy 30 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Use Algona altimeter setting; when not received, use Fort Dodge altimeter setting: increase LPV all Cats DA to 1536 feet, LNAV/VNAV all Cats DA to 1784 feet; increase all MDA 20 feet and LNAV Cat C visibility $\frac{1}{8}$ SM. Baro-VNAV NA.	MISSED APPROACH: Climb to 3000 direct EVIFI and hold.
-----------	---	---

AXA AWOS-3 118.475	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
------------------------------	--	---------------------------------

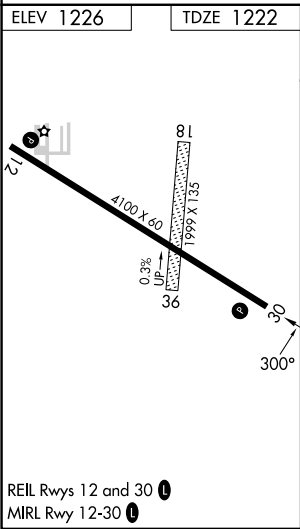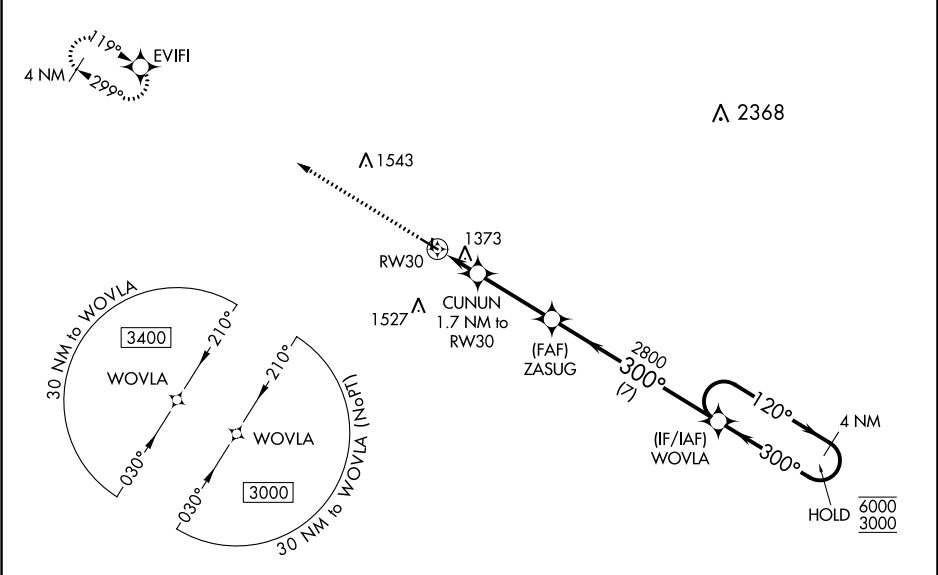

3000 ↑ EVIFI VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40). WOVLA 4 NM Holding Pattern					
LNAV only CUNUN 1.7 NM to RW30 ZASUG 2800 RW30 1800 120° 300° 6000 3000 GP 3.00° TCH 45 1.7 NM 3.1 NM 7 NM					
CATEGORY		A	B	C	D
LPV	DA	1534-1 312 (400-1)			NA
LNAV/ VNAV	DA	1782-1 $\frac{5}{8}$ 560 (600-1 $\frac{3}{8}$)			NA
LNAV	MDA	1740-1	518 (600-1)	1740-1 $\frac{3}{8}$ 518 (600-1 $\frac{3}{8}$)	NA
CIRCLING		1800-1 574 (600-1)	1940-1 714 (800-1)	1940-2 714 (800-2)	NA