

WAAS CH 90538 W31A	APP CRS 316°	Rwy Idg 3401 TDZE 754 Apt Elev 754
--	------------------------	---


RNAV (GPS) RWY 31

RNP APCH.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).
 ▼ Rwy 31 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using lowa City
 altimeter setting. When local altimeter setting not received, use lowa City altimeter setting; increase LPV
 and LNAV/VNAV DA to 1066 feet; increase all MDAs 80 feet and visibility LNAV Cat C ½ SM and
 Circling Cat C ¼ SM.

MISSED APPROACH.
Climb to 3000 direct
GLOMS and hold.

AWOS-3 127.825	CHICAGO CENTER 135.6 370.95	UNICOM 122.7 (CTAF) 1
--------------------------	---------------------------------------	---------------------------------

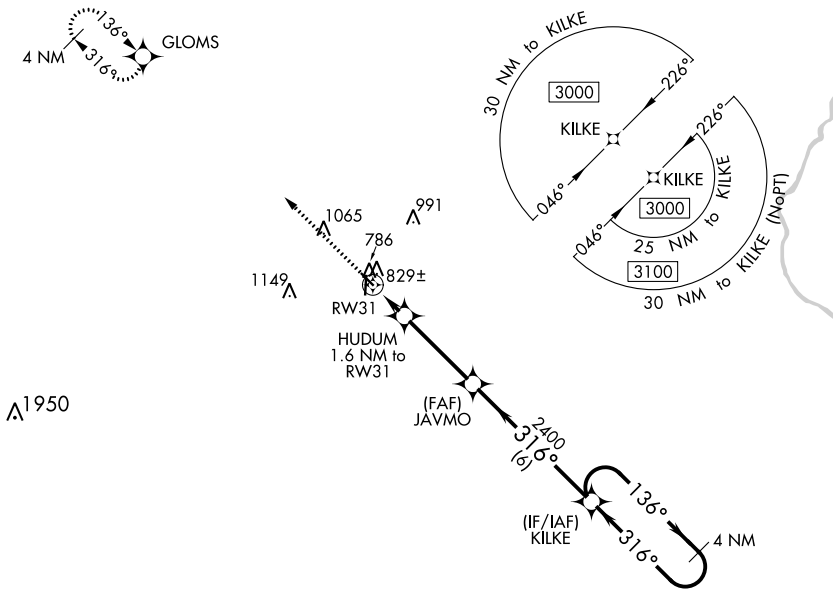

ELEV 754		TDZE 754
----------	--	----------

MIRL Rwy 13-31 and 18-36 **L**

REIL Rwys 13, 31, 18 and 36 **L**