RNAV (GPS) RWY 13

OSKALOOSA MUNI (OOA)

WAAS	APP CRS	Rwy Idg	4012
CH 78215	134°	TDZE	837
W13A		Apt Elev	841

RNP APCH.

When local altimeter setting not received, use Ottumwa altimeter setting and increase all DA 18 feet and all MDA 20 feet and increase LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Ottumwa altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 3000 direct HONPA and hold.

AWOS-3	CHICAGO CENTER	UNICOM
118.625	118.15 335.575	122.8 (CTAF) L

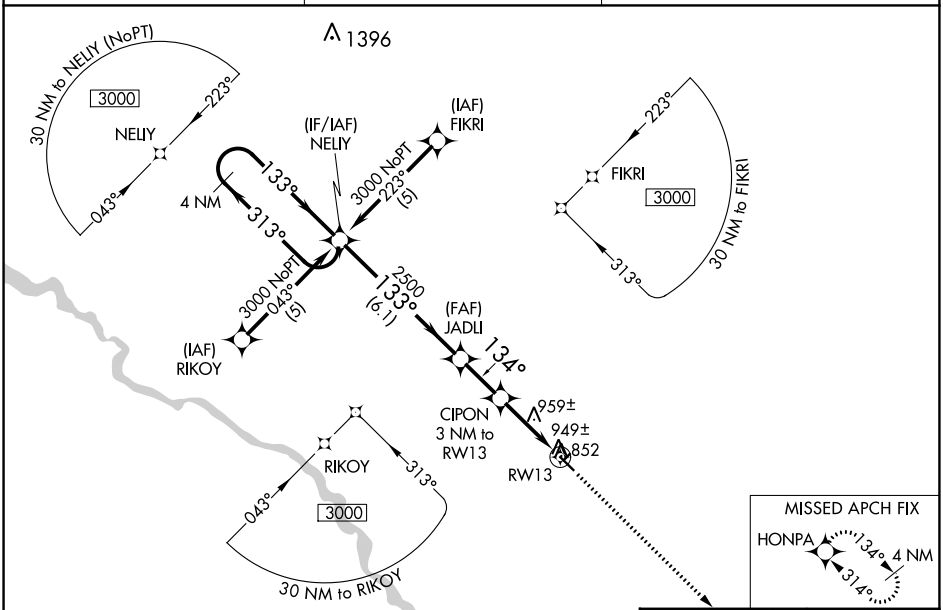

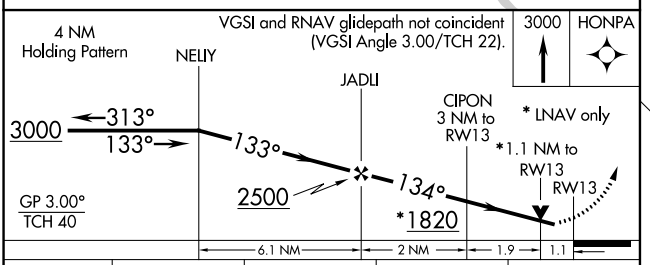



CATEGORY	A	B	C	D
LPV DA	1193-1¼ 356 (400-1¼)			NA
LNAV/VNAV DA	1219-1¼ 382 (400-1¼)			NA
LNAV MDA	1220-1 383 (400-1)			NA
CIRCLING	1260-1 419 (500-1)	1300-1 459 (500-1)	1300-1½ 459 (500-1½)	NA

REIL Rwys 13 and 31 L
MIRL Rwy 13-31 L

NC-3, 11 JUL 2024 to 08 AUG 2024
NC-3, 11 JUL 2024 to 08 AUG 2024