

LOC/DME I-MYO 111.35 Chan 50 (Y)	APP CRS 360°	Rwy Idg TDZE Apt Elev	9000 335 341
---	------------------------	-----------------------------	---

ILS or LOC RWY 36R



MEMPHIS INTL (MEM)

ALSIF-2 MISSED APPROACH: Climb to 1000 then climbing right turn to 5000 via heading 070° and MEM VORTAC R-040 to OROCU INT/MEM VORTAC 1.5 DME and hold, continue climb-in-hold to 5000.

MEMPHIS APP CON 119.1 291.6 (176°-355°) 125.8 338.3 (356°-175°)	MEMPHIS TOWER (Rwy 9-27) 118.3 257.8 (Rwys 18C-36C, 18L-36R) 119.7 257.8 (Rwy 18R-36L) 128.425 257.8	GND CON (Rwy 9-27) 121.0 379.2 (Rwys 18C-36C, 18L-36R) 121.9 379.2 (Rwy 18R-36L) 121.65 379.2	CLNC DEL 125.2
---	--	---	--------------------------

D-ATIS **127.75** CPDLC

RADAR REQUIRED

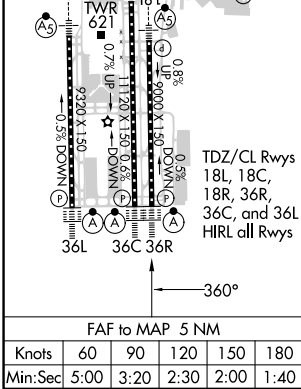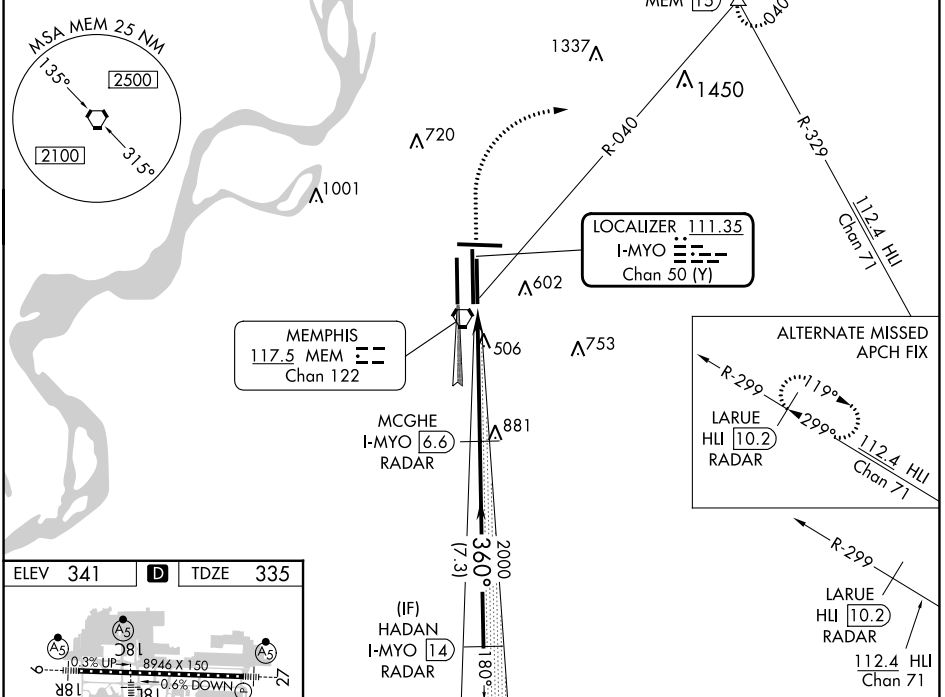

1000	5000	MEM R-040	OROCU	MCGHE I-MYO 6.6 RADAR 2000	HADAN I-MYO 14 RADAR 3000
↑		hdg 070°	△	2000	3000
I-MYO 1.7		I-MYO 2.8	360°		
1.2 NM		3.8 NM	7.3 NM		
VGS I and ILS glidepath not coincident (VGS I Angle 3.00/TCH 69).					
GS 3.00° TCH 58					

CATEGORY	A	B	C	D	E
S-ILS 36R	535/18 200 (200-½)		535/24 200 (200-½)		
S-LOC 36R	760/24	425 (500-½)	760/40	425 (500-¾)	760/50 425 (500-1)
CIRCLING	940-1 599 (600-1)		940-1½ 599 (600-1½)	1020-2¼ 679 (700-2¼)	1140-2¾ 799 (800-2¾)

SE-1, 08 AUG 2024 to 05 SEP 2024

SE-1, 08 AUG 2024 to 05 SEP 2024