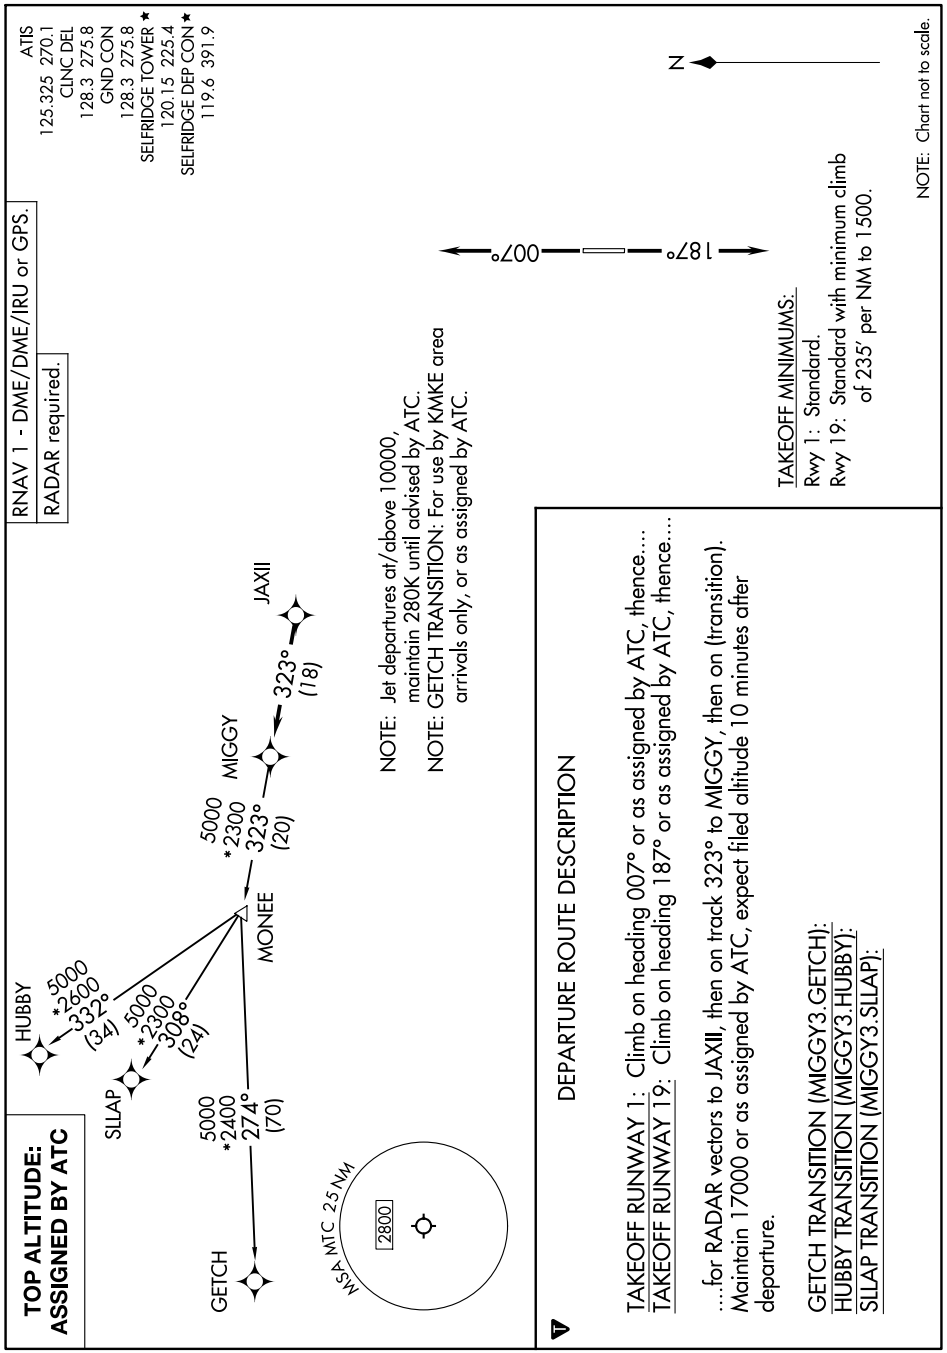
ATIS
125.325 270.1
CLNC DEL
128.3 275.8
GND CON
128.3 275.8
SELFRIDGE TOWER ★
120.15 225.4
SELFRIDGE DEP CON ★
119.6 391.9
RNAV 1 - DME/DME/IRU or GPS.
RADAR required.
TOP ALTITUDE: ASSIGNED BY ATC
HUBBY
5000
*2600
332°
(34)
SLAP
5000
*2300
308°
(24)
GETCH
5000
*2400
274°
(70)
MONEE
5000
*2300
323°
(20)
MIGGY
323°
(18)
JAXII
MSA MTC 25 NM
2800
NOTE: Jet departures at/above 10000, maintain 280K until advised by ATC.
NOTE: GETCH TRANSITION: For use by KMKE area arrivals only, or as assigned by ATC.
007°
187°
N
TAKEOFF MINIMUMS:
Rwy 1: Standard.
Rwy 19: Standard with minimum climb of 235' per NM to 1500.
NOTE: Chart not to scale.
DEPARTURE ROUTE DESCRIPTION
TAKEOFF RUNWAY 1: Climb on heading 007° or as assigned by ATC, thence....
TAKEOFF RUNWAY 19: Climb on heading 187° or as assigned by ATC, thence....
....for RADAR vectors to JAXII, then on track 323° to MIGGY, then on (transition). Maintain 17000 or as assigned by ATC, expect filed altitude 10 minutes after departure.
GETCH TRANSITION (MIGGY3.GETCH):
HUBBY TRANSITION (MIGGY3.HUBBY):
SLLAP TRANSITION (MIGGY3.SLLAP):