

PANAMA CITY, FLORIDA

RNAV (GPS) RWY 32R

| | | | |
|--------------------------|------------------|-------------------------------|--------------------|
| WAAS CH 52209 W32A | APCH CRS 319° | Rwy ldg TDZE Arprt Elev | 10,008 14 17 |
|--------------------------|------------------|-------------------------------|--------------------|

- (USAF)


TYNDALL AFB (KPAM)

| | | |
|---|--------|---|
| RNP APCH | ALSF-1 | MISSED APPROACH: Climb to 600 then climbing right turn to 3000 direct SUSIE and hold. |
| <p>▼ * When ALS inop increase RVR to 40, vis to 3/4 mile. ** When ALS inop increase RVR to 55, vis to 1 mile.</p> | | |

| | | | | | |
|----------------|--|-------------------------|------------------------|--------------------------|---------|
| ATIS★ 254.4 | APP CON/DEP CON 119.775 317.45 BLW 5000' 124.15 338.35 ABV 5000' | TOWER★ 133.95 263.15 | GND CON 121.9 259.3 | CLNC DEL 118.05 348.7 | ASR/PAR |
|----------------|--|-------------------------|------------------------|--------------------------|---------|

*** When ALS inop increase CAT AB RVR to 55, vis to 1 mile, CAT CDE vis to 1 3/8 miles.

For uncompensated Baro-VNAV systems, Procedure NA below 15°C (59°F) or above 54°C (130°F).
Average Cold Temperature based on standard -30.00°C ISA deviation.

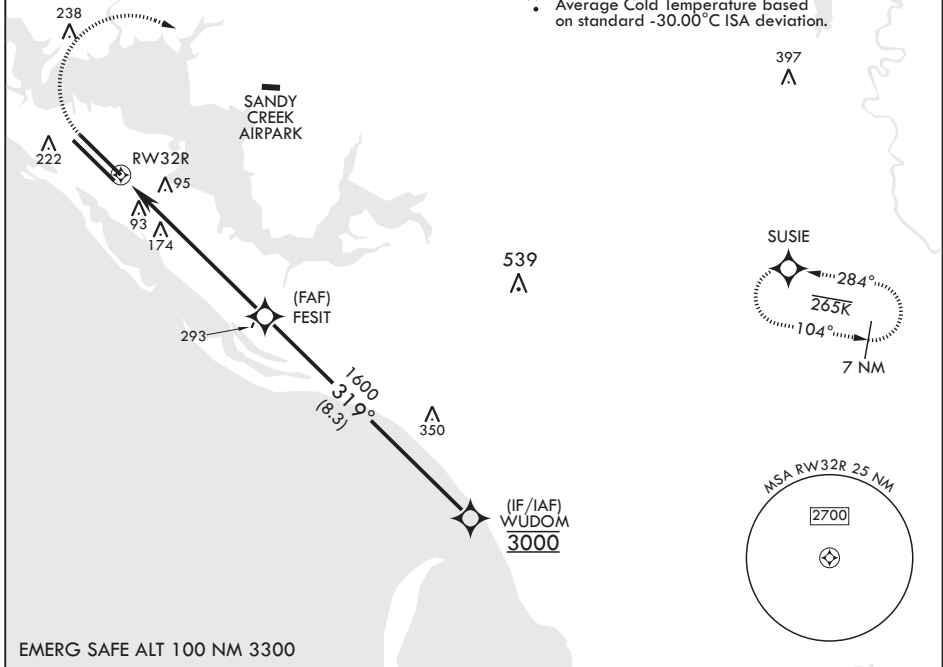

SE-3, 08 AUG 2024 to 05 SEP 2024

SE-3, 08 AUG 2024 to 05 SEP 2024

EMERG SAFE ALT 100 NM 3300

| | | | | | |
|----------------|--------|-------------|------------------------|----------------------|------------------------|
| 600 crs 318° | 3000 | SUSIE | WUDOM | ELEV 17 | TDZE 14 |
| | | | | | |
| CATEGORY | A | B | C | D | E |
| LPV DA* | 214/24 | | 200 | (200-½) | |
| LNAV/VNAV DA** | 362/30 | | 348 | (400-5%) | |
| LNAV MDA*** | 480/24 | 466 (500-½) | 480/50 | 466 | (500-1) |
| Ⓢ CIRCLING | 540-1 | 523 (600-1) | 540-1½ 523 (600-1½) | 580-2 563 (600-2) | 620-2¼ 603 (700-2¼) |

PANAMA CITY, FLORIDA

30°04'N - 85°34'W

TYNDALL AFB (KPAM)

Amdt 3 22APR21

RNAV (GPS) RWY 32R