


**TOP ALTITUDE:
ASSIGNED BY ATC**

D-ATIS
 128.35 269.9
 CLNC DEL
 120.125 318.1
 CPDLC
 GND CON
 121.9 348.6
 PORTLAND TOWER
 118.7 257.8 (Rwy 10L-28R)
 123.775 251.125 (Rwys 3-21, 10R-28L)
 PORTLAND DEP CON
 118.1 284.6 (100°-279°)
 124.35 299.2 (280°-099°)

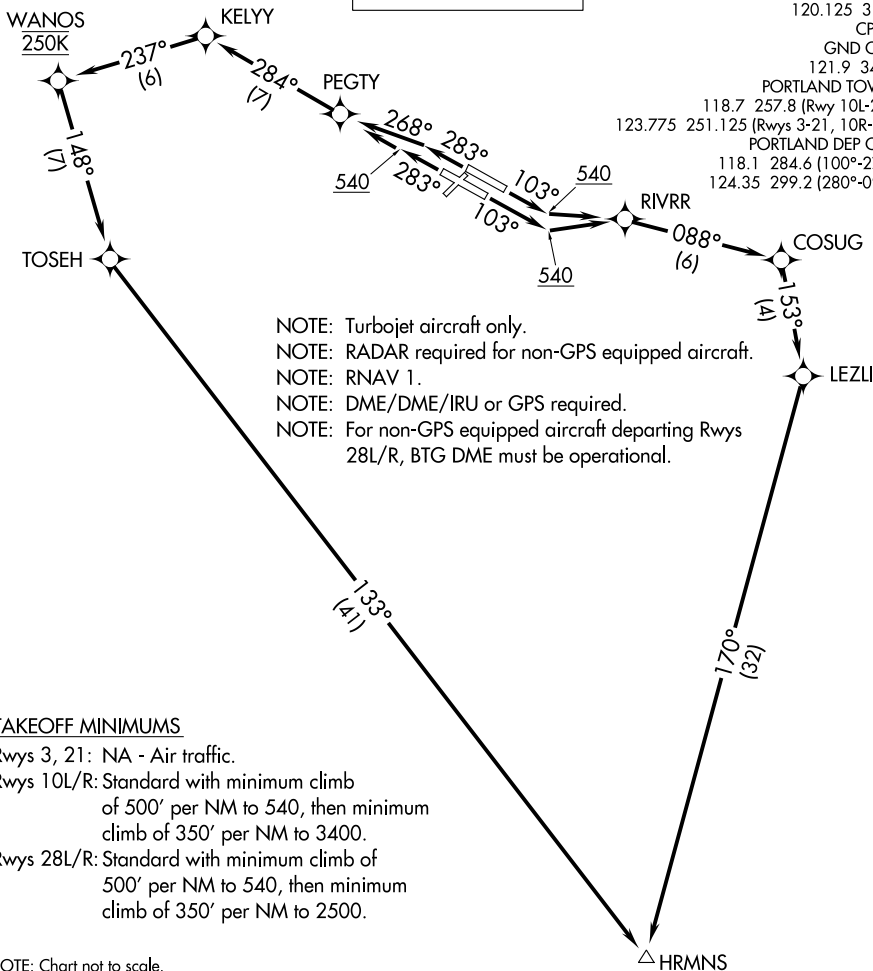

- NOTE: Turbojet aircraft only.
- NOTE: RADAR required for non-GPS equipped aircraft.
- NOTE: RNAV 1.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: For non-GPS equipped aircraft departing Rwys 28L/R, BTG DME must be operational.

TAKEOFF MINIMUMS

Rwys 3, 21: NA - Air traffic.
 Rwys 10L/R: Standard with minimum climb of 500' per NM to 540, then minimum climb of 350' per NM to 3400.
 Rwys 28L/R: Standard with minimum climb of 500' per NM to 540, then minimum climb of 350' per NM to 2500.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L/R: Climb heading 103° to 540, then direct to RIVRR, then on depicted route to HRMNS, thence. . . .

TAKEOFF RUNWAY 28L: Climb heading 283° to 540, then direct PEGTY, then on depicted route to HRMNS, thence. . . .

TAKEOFF RUNWAY 28R: Climb heading 283°, intercept course 268° to PEGTY, then on depicted route to HRMNS, thence. . . .

. . . .maintain assigned altitude, expect filed altitude 10 minutes after departure.