

SAN ANTONIO, TEXAS

RNAV (GPS) RWY 16

WAAS CH 52296 W16A	APCH CRS 158°	Rwy ldg TDZE Arprt Elev	11,550 690 690
--------------------------	------------------	----------------------------	----------------------

AL-371 (USAF)

KELLY FLD (KSKF)

RNP APCH * When ALS inop, increase RVR to 40, vis to 3/4 miles. ** When ALS inop, increase RVR to 60, vis to 1 1/8 miles.	ALS-1	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct FITER and hold.
---	-------	--

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
----------------------	-------------------------------------	-----------------------------	------------------------



*** When ALS inop, increase CAT AB RVR to 55, and vis to 1 mile; CAT CDE vis to 1 7/8 miles.

**** Circling not authorized E of Rwy 16-34.

1985

REUBE

For uncompensated BARO-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (129°F).

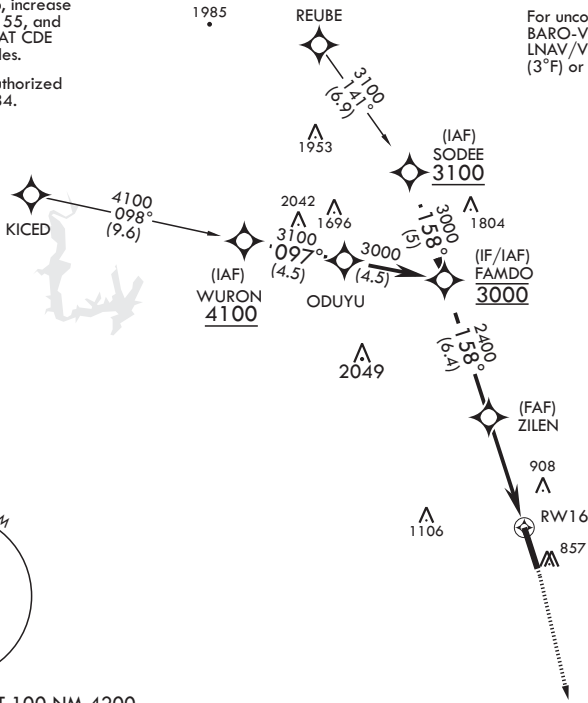

EMERG SAFE ALT 100 NM 4200

FAMDO VGSi and descent angles not coincident (VGSi Angle 3.01/TCH 89). GP 3.00° TCH 57	3000	ZILEN 2400 1.8 NM to RWY 16 5.1 NM	1500	3000	FITER	ELEV 690	TDZE 690
	158° 1707 TWR 780 BCN 727 855 HIRL all Rwy's 34		1500 x 1.50 0.36 NM 150	158° 707 TWR 780 BCN 727 855 HIRL all Rwy's 34	1500 3000 FITER	ELEV 690 TDZE 690	
CATEGORY	A	B	C	D	E		
LPV DA*	890/24		200	(200-½)			
LNAV/VNAV DA**	1080/35		390	(400-¾)			
LNAV MDA***	1360/24 670 (700-½)		1360-1½	670	(700-1½)		
CIRCLING****	1360-1 670 (700-1)		1360-1½ (700-1½)	1400-2¼ (800-2¼)	1900-3 (1300-3)		

SAN ANTONIO, TEXAS
Amdt 2 23FEB23

29°23'N - 98°35'W

KELLY FLD (KSKF)

RNAV (GPS) RWY 16

SC-3, 08 AUG 2024 to 05 SEP 2024

SC-3, 08 AUG 2024 to 05 SEP 2024