RNAV (GPS) RWY 19

MARQUETTE/SAWYER RGNL (SAW)

WAAS	APP CRS	Rwy Idg	9072
CH **86616**	**193°**	TDZE	**1204**
W19A		Apt Elev	**1204**

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.

MISSED APPROACH: Climb to 3500 direct EVYIP and hold.

AWOS-3PT	MINNEAPOLIS CENTER	SAWYER TOWER ★	GND CON	UNICOM
118.375	**119.1 290.2**	**119.975** (CTAF) L	**121.65**	**122.7**

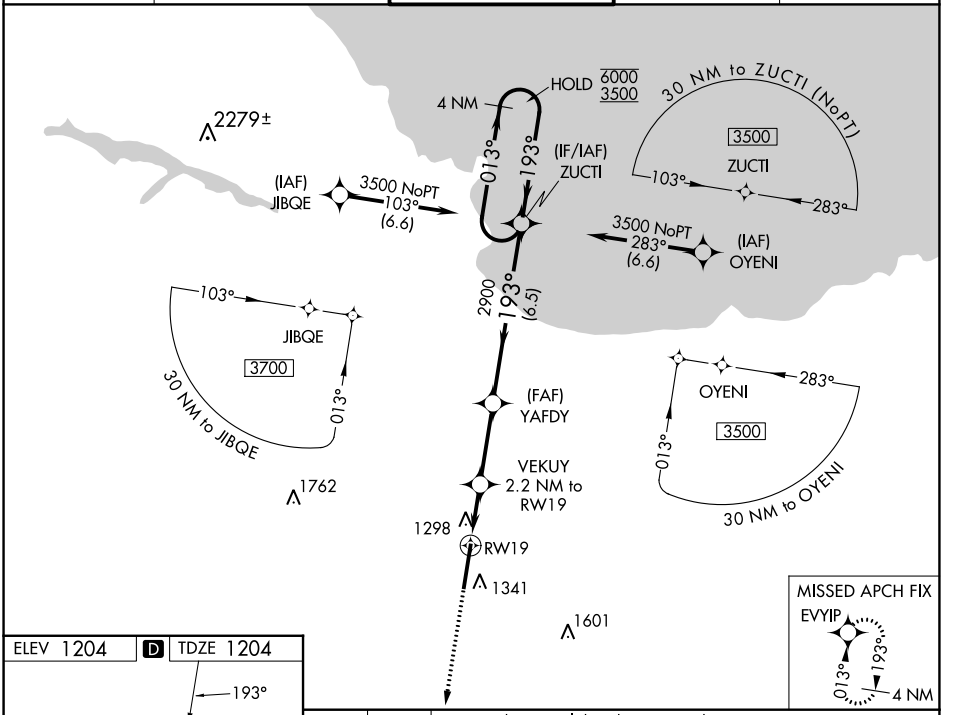

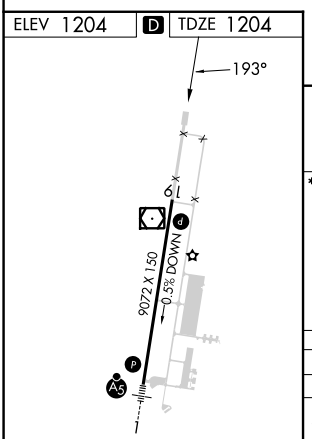

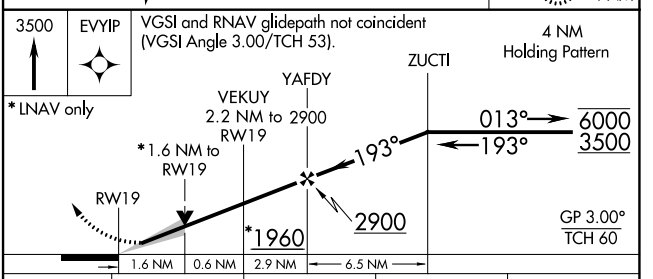

CATEGORY	A	B	C	D
LPV DA	1404-¾ 200 (200-¾)			
LNAV/VNAV DA	1521-⅞ 317 (400-⅞)			
LNAV MDA	1620-1 416 (500-1)		1620-1⅛ 416 (500-1⅛)	
C CIRCLING	1680-1 476 (500-1)		1820-1¾ 616 (700-1¾)	1820-2 616 (700-2)

EC-1, 08 AUG 2024 to 05 SEP 2024
EC-1, 08 AUG 2024 to 05 SEP 2024