| WAAS CH 99701 W24A | APP CRS 240° | Rwy Idg 5500 TDZE 545 Apt Elev 547 |
|---|---|---|

# RNAV (GPS) RWY 24

MUSCATINE MUNI (MUT)

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). For inop ALS, increase LPV all visibilities to 1 SM, increase LNAV/VNAV all Cats and LNAV Cats C visibility to 1⅛ SM, and increase LNAV Cat D visibility to 1¼ SM. When local altimeter setting not received, use Iowa City altimeter setting and increase LPV DA to 992 and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1030 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV Cats C and D visibility ¼ SM and Circling Cat C visibility ¼ SM. For inop ALS when using Iowa City altimeter setting, increase LPV all visibilities to 1 SM, LNAV/VNAV all visibilities to 1⅜ SM, LNAV Cats A and B visibility to 1 SM, and LNAV Cats C and D visibility to 1⅜ SM. Baro-VNAV and VDP NA when using Iowa City altimeter setting.

MALSR

MISSED APPROACH: Climb to 3000 direct IZBUF and hold.

| AWOS-3P | QUAD CITY APP CON * | CLNC DEL | UNICOM |
|---|---|---|---|
| 120.625 | 133.275 257.8 | 119.125 | 122.7 (CTAF) L |

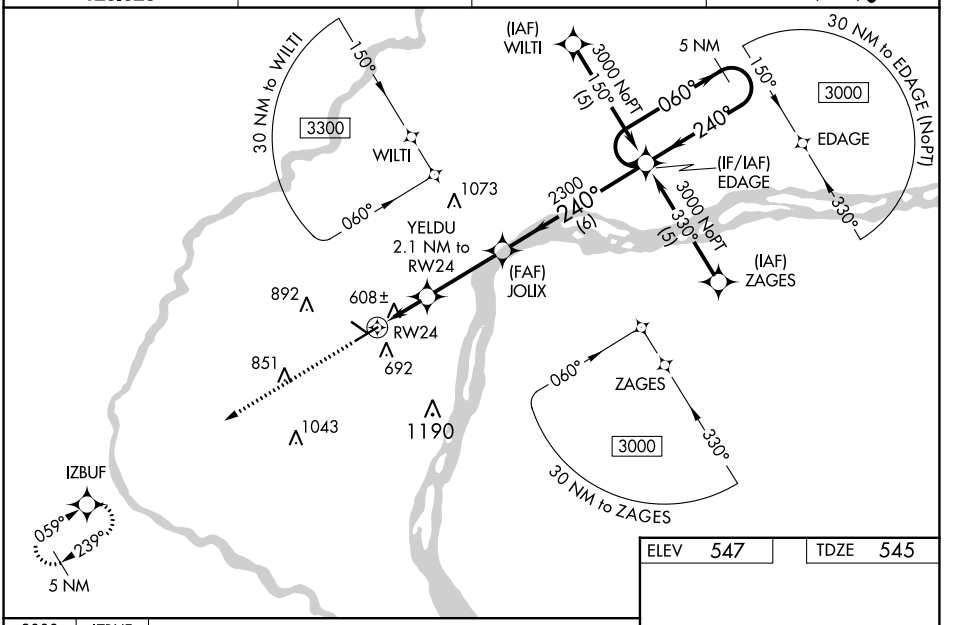


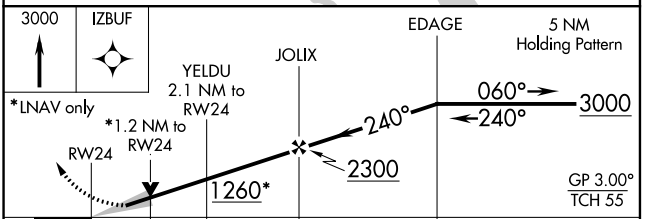


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 812-½ 267 (300-½) | | | |
| LNAV/VNAV DA | 950-¾ 405 (500-¾) | | | |
| LNAV MDA | 960-½ 415 (500-½) | | 960-¾ 415 (500-¾) | 960-1 415 (500-1) |
| C CIRCLING | 1080-1¼ 533 (600-1¼) | 1200-1¼ 653 (700-1¼) | 1200-1¾ 653 (700-1¾) | 1500-3 953 (1000-3) |

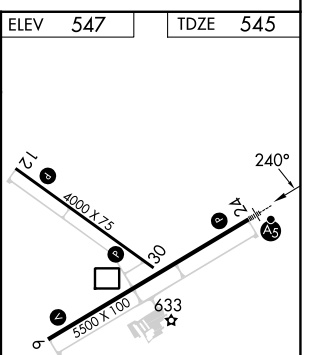


REIL Rwys 6, 12, and 30 L

MIRL Rwys 6-24 and 12-30 L



NC-3, 08 AUG 2024 to 05 SEP 2024
NC-3, 08 AUG 2024 to 05 SEP 2024