

WAAS CH <b>62827</b> <b>W23A</b>	APP CRS <b>232°</b>	Rwy Idg TDZE Apt Elev	<b>7100</b> <b>93</b> <b>93</b>
--	------------------------	-----------------------------	---------------------------------------


# RNAV (GPS) RWY 23

ALBERT J ELLIS (O.A.J)


**⚠** Baro-VNAV NA when using Wilmington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Wilmington altimeter setting. When local altimeter setting not received, use Wilmington altimeter setting and increase LPV DA to 387 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 591 feet; increase all MDAs 100 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ¼ SM.

**MISSED APPROACH:**  
Climb to 2100 direct  
CUVAL and hold.

ATIS <b>124.475</b>	WILMINGTON APP CON ★ <b>135.75 317.425</b>	ELLIS TOWER ★ <b>132.65 (CTAF)</b>	GND CON <b>125.4</b>	CLNC DEL <b>121.4 257.6</b> (when twr closed)	UNICOM <b>122.95</b>
------------------------	---	---------------------------------------	-------------------------	---	-------------------------

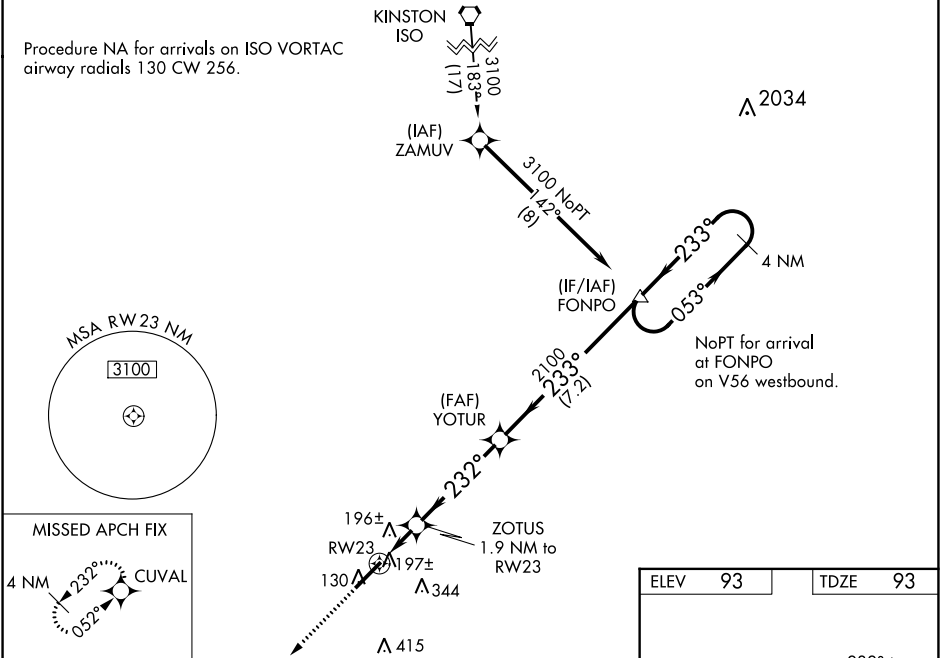

CATEGORY	A	B	C	D
LPV DA		293-¾	200 (200-¾)	
LNAV/VNAV DA		497-1⅓	404 (500-1⅓)	
LNAV MDA		460-1	367 (400-1)	
CIRCLING	540-1	560-1	720-1¾	720-2
	447 (500-1)	467 (500-1)	627 (700-1¾)	627 (700-2)

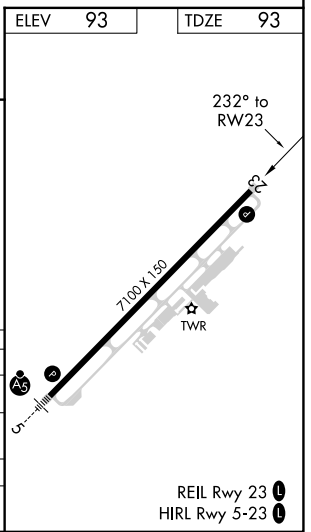

SE-2, 08 AUG 2024 to 05 SEP 2024

SE-2, 08 AUG 2024 to 05 SEP 2024