WAAS	APP CRS	Rwy Idg	5507
CH 86525	321°	TDZE	996
W32A		Apt Elev	998

RNAV (GPS) RWY 32

NEW RICHMOND RGNL (RNH)

RNP APCH.

Baro-VNAV NA when using Osceola altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 37°C (98°F). Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Osceola altimeter setting and increase all DA/MDA 40 feet; increase LNAV visibility Cats C and D ⅛ SM and Circling Cats C and D ¼ SM. Circling to Rwy 4, 22 NA.

MISSED APPROACH: Climb to 3500 direct ENEPE and hold.

AWOS-3	MINNEAPOLIS APP CON	GCO	UNICOM
120.0	121.2 335.65	121.725	122.975 (CTAF) L

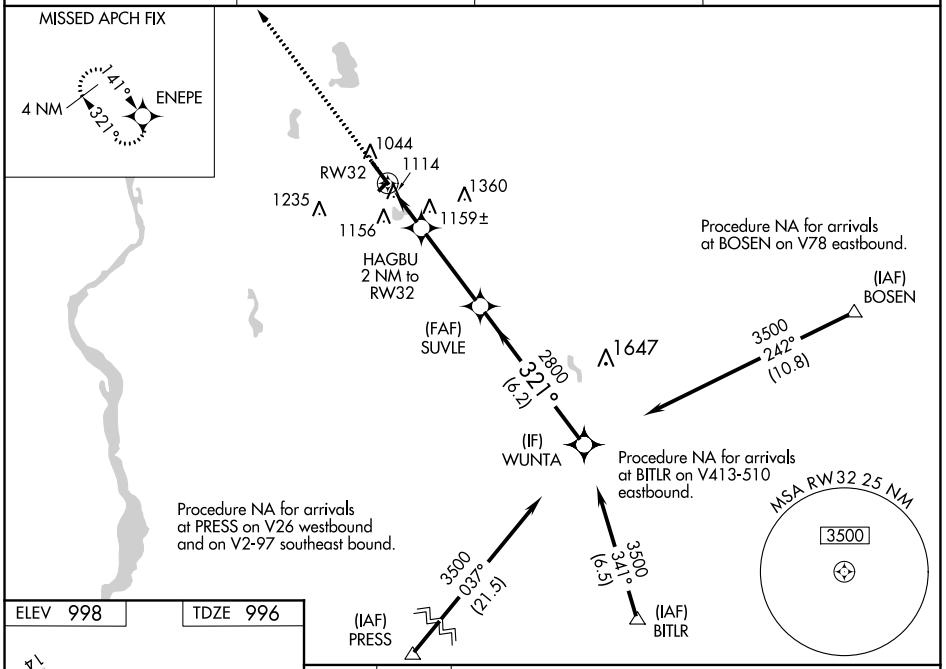

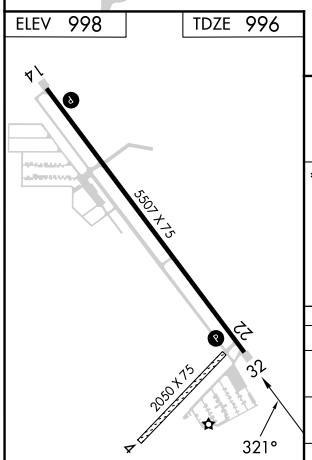

MIRL Rwy 14-32 L
REIL Rwys 14 and 32 L

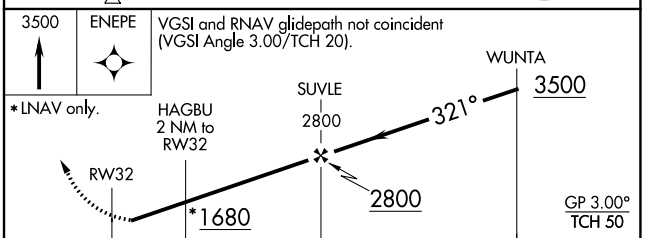

CATEGORY	A	B	C	D
LPV DA	1246-1 250 (300-1)			
LNAV/VNAV DA	1295-1 299 (300-1)			
LNAV MDA	1420-1 424 (500-1)		1420-1¼ 424 (500-1¼)	
C CIRCLING	1540-1 542 (600-1)		1660-1¾ 662 (700-1¾)	1660-2 662 (700-2)

EC-3, 08 AUG 2024 to 05 SEP 2024
EC-3, 08 AUG 2024 to 05 SEP 2024