ALASKA 151

KODIAK

KODIAK (ADQ)(PADQ) P (CG) 4 SW UTC-9(-8DT) N57°44.99′ W152°29.64′ 79 B ARFF Index—See Remarks NOTAM FILE ADQ

Q **H-1B, 2K, L-2J, 3D** D-150 IAP, AD

RWY 08-26: H7534X150 (ASPH-GRVD) S-53, D-110, 2D-150 PCN 70 F/B/Y/T HIRL 0.8% up W

RWY 08: Thid dsplcd 1138'. Hill.

RWY 26: REIL. VASI(V2L)-GA 2.05° TCH 54'. Rgt tfc.

RWY 11–29: H5400X150 (ASPH–GRVD) S–53, D–110, 2D–150

PCN 44 F/B/Y/T HIRL

RWY 11: Thid dsplcd 440'. Trees.

RWY 29: VASI(V2L). Thid dsplcd 556'. Rgt tfc.

RWY 01–19: H5010X150 (ASPH–GRVD) S–53, D–110, 2D–150 PCN 48 F/B/X/U HIRL 0.3% up S

RWY 01: REIL. VASI(V2L)—GA 3.75° TCH 57'. Trees. Rgt tfc.

RUNWAY DECLARED DISTANCE INFORMATION

 RWY 08: TORA-7534
 TODA-7534
 ASDA-7534
 LDA-6396

 RWY 11: TORA-4960
 TODA-4960
 ASDA-4960
 LDA-4402


 RWY 26: TORA-7534
 TODA-7534
 ASDA-7534
 LDA-7534

 RWY 29: TORA-4844
 TODA-4844
 ASDA-4844
 LDA-4402

ARRESTING GEAR/SYSTEM RWY 01: EMAS RWY 08: EMAS

SERVICE: S2 FUEL 100LL, JET A1 LGT ACTVT REIL Rwy 01 and 26;

VASI Rwy 01, 26, 29; HIRL Rwy 01–19, 08–26, 11–29; twy Igts—CTAF. Rwy 01 REIL are omnidirectional to accommodate circling apchs. Rwy 01 VASI does not provide obst clearance beyond 2.0 NM from thId, unusable beyond 2.0 NM.

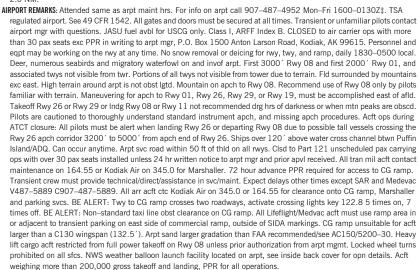

AIRPORT MANAGER: 907-487-4952

WEATHER DATA SOURCES: ASOS (907) 487–2442 (WX CAM)
COMMUNICATIONS: CTAF 119.8 UNICOM 122.8 ATIS 134.45

RCO 119.8 (KENAI FSS)

WOODY ISLAND RCO 122.2 (KENAI FSS)

ANCHORAGE CENTER APP/DEP CON 281.4 125.1

 $\textbf{TOWER} \ 239.0 \ 119.8 \ (\textbf{Oct} \ 1-\textbf{Mar} \ 31 \ 1530-0500Z\ddagger, \ \textbf{Apr} \ 1-\textbf{Sep} \ 30 \ 1600-0700Z\ddagger.) \ \textbf{GND} \ \textbf{CON} \ 121.9$

COAST GUARD AIR OPERATIONS (KODIAK AIR) 345.0 156.8 2182 2678

CONTINUED ON NEXT PAGE

ΚΟΝΙΔΚ

152 ALAS

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D svc 1530-0500Z‡ 1 Oct-31 Mar, 1600-0700Z‡ 1 Apr-30 Sep; other times CLASS E. RADIO AIDS TO NAVIGATION: NOTAM FILE ADQ.

(H) (H) VORW/DME 117.1 ODK Chan 118 N57°46.50′ W152°20.39′ 239° 5.2 NM to fld. 133/14E. VOR unusable:

190°-310° bvd 15 NM blo 12.000′

DME unusable:

154°-265° byd 15 NM blo 12,000°

266°-305° 306°-341° byd 15 NM blo 12,000′

WOODY ISLAND NDB (HW) 394 RWO N57°46.49′ W152°19.48′ 241° 5.6 NM to fld. 24/14E.

ILS/DME 110.9 I–ADQ Chan 46 Rwy 26. Class IA. Front unusable within 2.0 DME (0.7 NM from thld). LOC unusable bvd 30° r of course.

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737. RCO available when twr closed.

KODIAK (LILLY LAKE) SPB (9Z3) 1 NE UTC-9(-8DT) N57°48.16′ W152°22.96

130 LRA NOTAM FILE ENA WATERWAY NE-SW: 2100X250 (WATER)

WATERWAY NE: Rgt tfc.

SEAPLANE REMARKS: Unattended. Arpt clsd at ngt. Arpt CLOSED High/Low wing except 49' and under. Ctc Kodiak Twr 119.8. Windsock located at Kodiak Muni Arpt. Numerous unlit obstructions in vicinity. Be alert possible conflicting traffic with NE operations and lake based acft. Land around lake is private property. All docks and ramps are privately owned.

AIRPORT MANAGER: 907-486-8060

COMMUNICATIONS: CTAF 119.8 UNICOM 122.8 RADIO AIDS TO NAVIGATION: NOTAM FILE ADQ.

(H) (H) VORW/DME 117.1 ODK Chan 118 N57°46.50 W152°20.39′ 306° 2.2 NM to fld. 133/14E.

VOR unusable:

190°-310° byd 15 NM blo 12,000′

DME unusable:


154°-265° byd 15 NM blo 12,000′

266°-305°

306°-341° byd 15 NM blo 12,000′

COMM/NAV/WEATHER REMARKS: For toll free call to Kenai FSS dial

1-866-864-1737.



KODIAK

KODIAK

KODIAK MUNI (KDK)(PAKD) 2 NE UTC-9(-8DT) N57°48.36′ W152°22.43

RWY 02-20: H2475X40 (ASPH-TRTD)

RWY 02: Thid dsplcd 240'. Tree. Rgt tfc.

RWY 20: Trees.

AIRPORT REMARKS: Attended daylight hrs. Arpt unlit and CLOSED for ngt ops. Ctc Kodiak twr for tfc advisory, 119.8. Arpt CLOSED High/Low wing except 49' under. Numerous unlit obstructions in vicinity. Conflicting traffic with Lilly Lake Trident Basin and Kodiak Arpt. Rwy 02–20 surrounded by numerous businesses in close proximity. Rwy 02–20 pavement width varies from 20' wide on Rwy 20 end to 30' wide on Rwy 02 end. Pavement is cracked length of rwy. Rwy 20 road crosses apch 15' blo thld elev 200' from rwy thld. Rwy slopes uphill 67' from Rwy 02 dsplcd thld to Rwy 20. Rwy 02–20 NSTD markings faded to invisible, no line of sight between rwy ends. First 350' of Rwy 02 slopes 5% uphill.

AIRPORT MANAGER: 907-486-8060

COMMUNICATIONS: CTAF 119.8 UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE ADQ.

(H) (H) VORW/DME 117.1 ODK Chan 118 N57°46.50′

W152°20.39′ 316° 2.2 NM to fld. 133/14E.

VOR unusable:

190°-310° byd 15 NM blo 12,000′

DME unusable:

154°–265° byd 15 NM blo 12,000′

266°-305°

306°-341° byd 15 NM blo 12,000′

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737.

