APP CRS	Rwy Idg	8310
133°	TDZE	478
	Apt Elev	487

RNAV (RNP) X RWY 13R

DALLAS LOVE FLD (DAL)

For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct ENAVE and on track 151° to TACKE and hold.

D-ATIS	REGIONAL APP CON	LOVE TOWER	GND CON	CLNC DEL	CPDLC
120.15	NORTH 124.3 282.275 SOUTH 125.2 343.65	123.7 239.3	121.75 348.6	127.9	

RADAR REQUIRED

MSA RW 13 R 25 NM
3600

(IF) NETNE
3000 210K
(RNP 0.80)
(RF REQD)

2100
183°
(3.8)

(IF) FRDDM

OBUDE
190K

1600
(1.6)

1600
133° (3)

(FAF) TOFLY

133°
(3.4)

RW13R

975
1249
652
914
1048
893
860
790
920
1049
1368
ENAVE
1049
1049
1049

151°
(14.1)

MISSED APCH FIX
TACKE
151°
331°
4 NM

ELEV 487 D TDZE 478

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).

3000	ENAVE	tr 151°	TACKE

See planview for multiple IF locations.

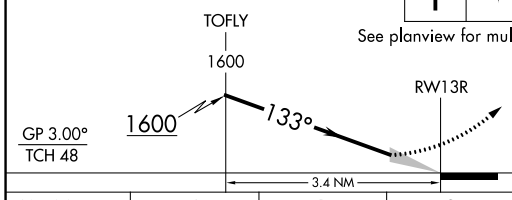

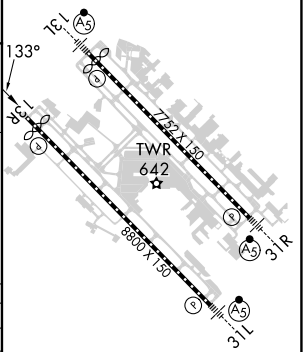

CATEGORY	A	B	C	D
RNP 0.20 DA		781/50	303 (300-1)	
RNP 0.25 DA		833/60	355 (400-1¼)	
RNP 0.30 DA		929-1½	451 (500-1½)	

AUTHORIZATION REQUIRED

TDZ/CL Rwys 13L and 31L
HIRL Rwys 13L-31R, and 13R-31L

SC-2, 05 SEP 2024 to 03 OCT 2024
SC-2, 05 SEP 2024 to 03 OCT 2024