

|                        |                             |   |
|------------------------|-----------------------------|---|
| APP CRS<br><b>355°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5494</b><br><b>197</b><br><b>202</b> |
|------------------------|-----------------------------|---|



# RNAV (GPS) RWY 36

BEAUREGARD RGNL (DRI)



**⚠** Inoperative table does not apply. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase LNAV/LNAV DA to 622 feet and visibility all Cats ¼ SM; increase all MDAs 60 feet and visibility LNAV Cats C/D and Circling Cats C/D ¼ SM.

**ODALS** MISSED APPROACH: Climb to 1900 direct LOUDR and hold.

|                            |                                    |                               |
|----------------------------|------------------------------------|-------------------------------|
| AWOS-3PT<br><b>118.225</b> | POLK APP CON<br><b>123.7 261.3</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|------------------------------------|-------------------------------|

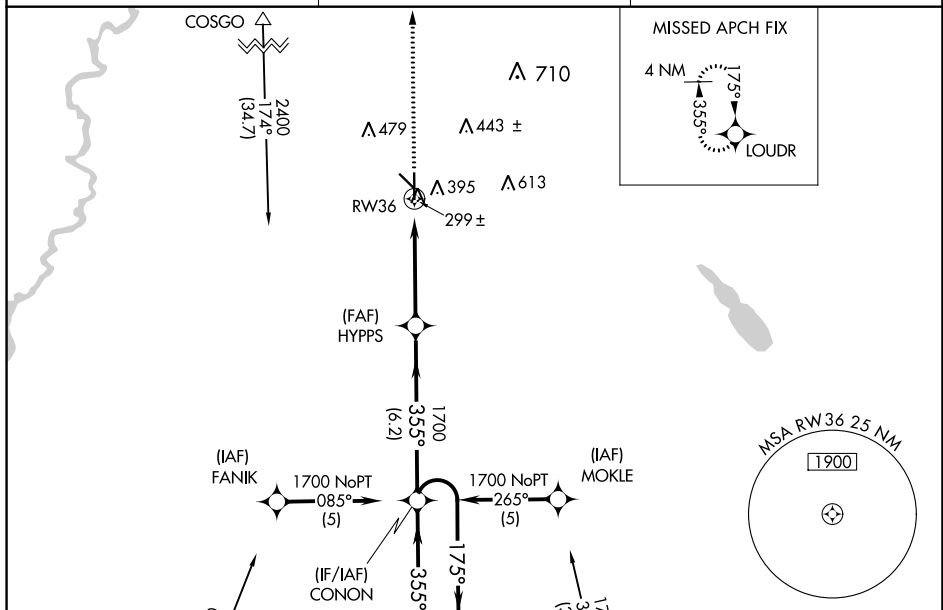

|          |          |
|----------|----------|
| ELEV 202 | TDZE 197 |
|----------|----------|

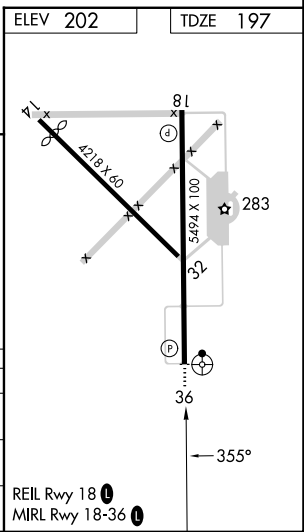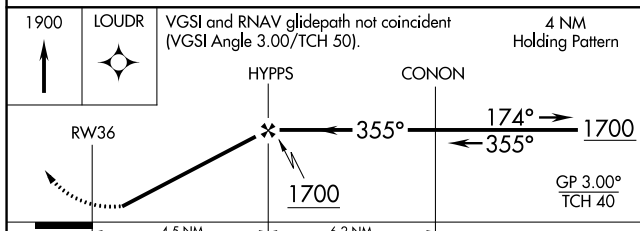

| CATEGORY     | A      | B           | C                      | D                       |
|--------------|--------|-------------|------------------------|-------------------------|
| LNAV/VNAV DA | 569-1¼ |             | 372 (400-1¼)           |                         |
| LNAV MDA     | 660-1  | 463 (500-1) | 660-1¼<br>463 (500-1¼) | 660-1½<br>463 (500-1½)  |
| CIRCLING     | 720-1  | 518 (600-1) | 780-1½<br>578 (600-1½) | 1000-2½<br>798 (800-2½) |

SC-4, 05 SEP 2024 to 03 OCT 2024

SC-4, 05 SEP 2024 to 03 OCT 2024