

ST. LOUIS, MISSOURI

AL-360 (FAA)

24249

WAAS CH 69499 W12A	APP CRS 123°	Rwy Idg 8956 TDZE 541 Apt Elev 618
--	------------------------	---

RNAV (GPS) Y RWY 12L

ST LOUIS LAMBERT INTL (STL)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to 1½ SM. LNAV/VNAV Cat E visibility to 1¾ SM, and LNAV Cat E visibility to 1¾ SM. Simultaneous approach authorized with Rwy 11. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.


ALSF-2



MISSED APPROACH: Climb to 3000 direct ODITY and on track 071° to TOY VORTAC and hold.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	--	---	--------------------------------	-------

RADAR REQUIRED

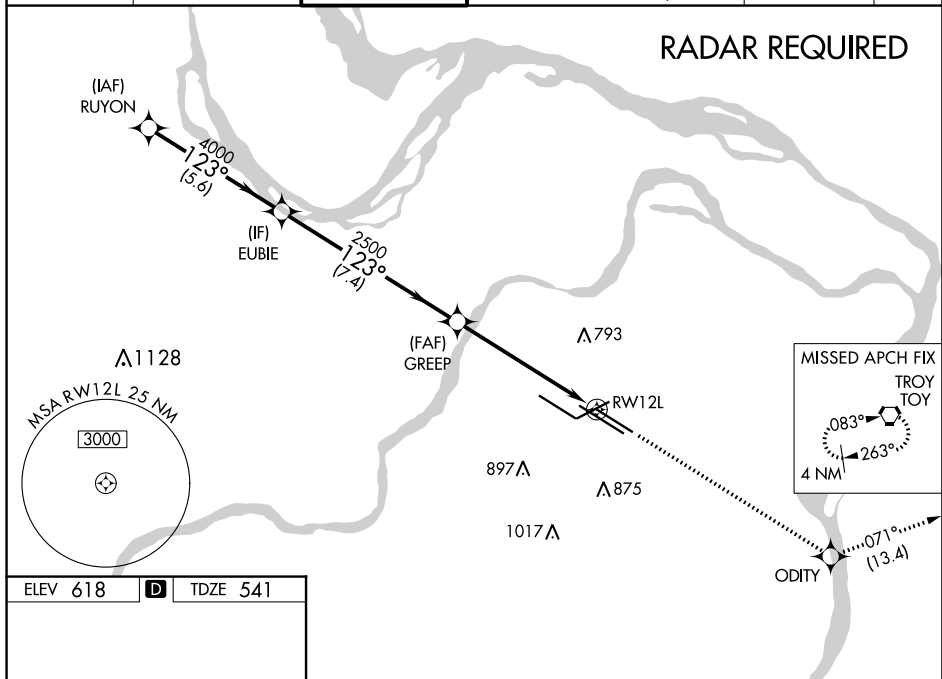

Rwy 6-24 7603 X 150
 Rwy 11-29 9000 X 150
 Rwy 12L-30R 9013 X 150
 Rwy 12R-30L 11020 X 150

123°

9.6% DOWN
 0.2% UP
 0.2% DOWN
 0.7% DOWN
 1.3% DOWN

TWR 774

HIRL all Rwws
 TDZ/CL Rwws 11, 12L, 12R, 29, and 30R

RUYON		EUBIE		GREEP		TOY	
5000		4000		2500		1.4 NM	
123°						*LNAV only	
GP 3.00°							
TCH 54							
5.6 NM		7.4 NM		4.5 NM		1.4 NM	
CATEGORY	A	B	C	D	E		
LPV DA	951/50 410 (400-1)						
LNAV/VNAV DA	1040/60 499 (500-1¼)						
LNAV MDA	1040/24 499 (500-½)	1040/40 499 (500-¾)	1040/50 499 (500-1)	1040/60 499 (500-1¼)			

ST. LOUIS, MISSOURI

Amdt 2D 29MAR18

38°45'N-90°22'W

ST LOUIS LAMBERT INTL (STL)

RNAV (GPS) Y RWY 12L

NC-3, 05 SEP 2024 to 03 OCT 2024

NC-3, 05 SEP 2024 to 03 OCT 2024