RNAV (GPS) Y RWY 12

TRI-CITIES (PSC)

WAAS CH 58006 W12A	APP CRS 121°	Rwy Idg 7504 / TDZE 402 / Apt Elev 410

T A Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting: increase all DA 95 feet and all MDA 100 feet. Increase LPV all Cats visibilities ⅛ mile; LNAV/VNAV all Cats visibilities ⅜ mile; increase LNAV and Circling Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 900 then climbing left turn to 3200 direct CITYS and hold.

ATIS	SPOKANE APP CON ★	TRI-CITIES TOWER ★	GND CON	CLNC DEL	UNICOM
125.65	128.75 377.2	135.3 (CTAF) L 323.3	121.8	120.0	122.95

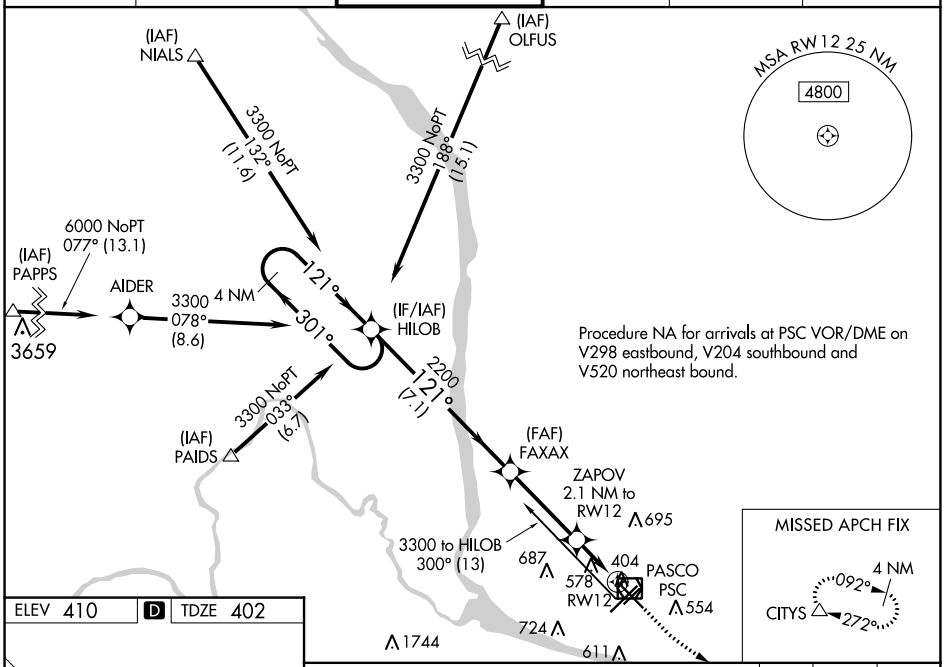

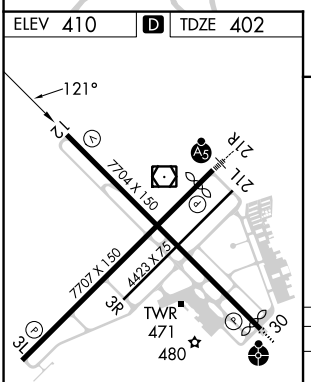

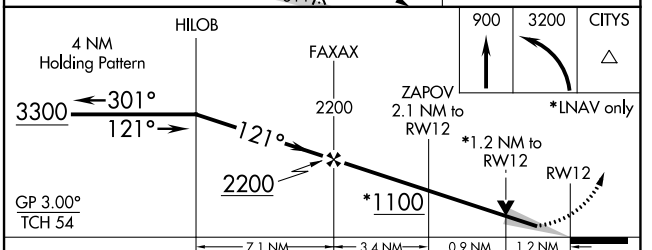

CATEGORY	A	B	C	D
LPV DA	602-¾ 200 (200-¾)			
LNAV/VNAV DA	755-1⅛ 353 (400-1⅛)			
LNAV MDA	840-1 438 (500-1)		840-1⅜ 438 (500-1⅜)	
C CIRCLING	880-1 470 (500-1)	940-1 530 (600-1)	1040-1¾ 630 (700-1¾)	1100-2¼ 690 (700-2¼)

REIL Rwys 3L and 12
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L

NW-1, 05 SEP 2024 to 03 OCT 2024
NW-1, 05 SEP 2024 to 03 OCT 2024