
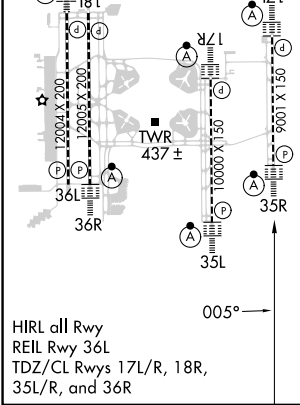


WAAS CH 86314 W35A	APP CRS 005°	Rwy Idg 9001 TDZE 90 Apt Elev 96
--	------------------------	---

RNAV (GPS) RWY 35R

ORLANDO INTL (MCO)

RNP APCH. ▼ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D visibility to RVR 5500. Bright lights on highway midway between Rwy 35L and Rwy 35R may be mistaken for runway lights.		ALSIF-2 A	MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PRESK and hold, continue climb-in-hold to 3000.
D-ATIS ARR 121.25 DEP 120.525	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (Rwys 17L-35R, 17R-35L) 124.3 253.5 (Rwys 18L-36R, 18R-36L)	GND CON 126.4 (East) 121.8 (West)
		CLNC DEL 134.7 341.7	CPDLC

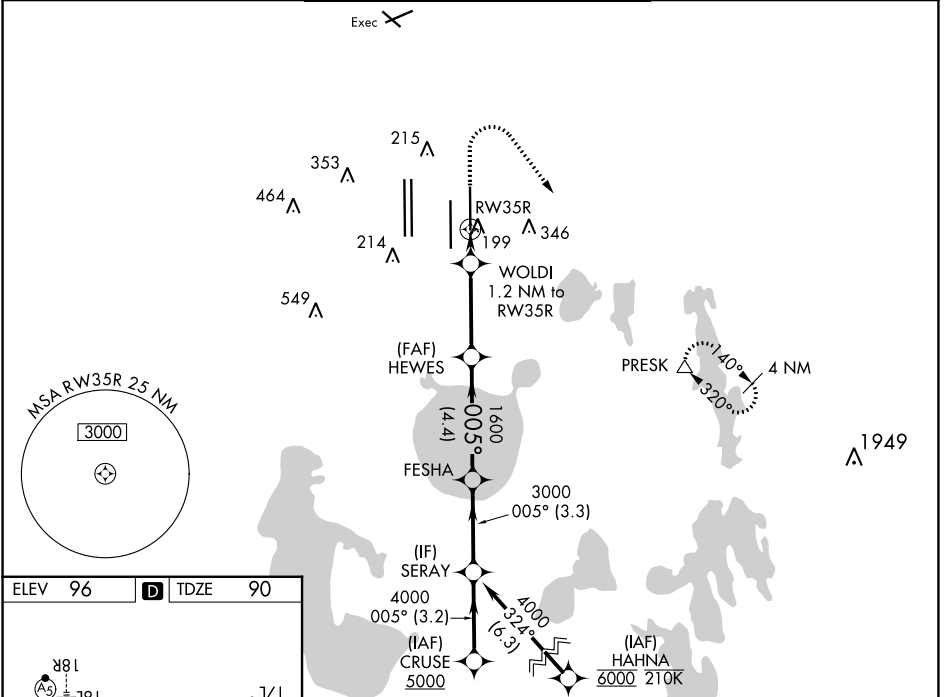

ELEV 96	D	TDZE 90	
500	3000	PRESK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).
WORLDI 1.2 NM to RWY 35R		HEWES 1600	FESHA 3000
SERAY 4000		CRUSE 5000	
GP 3.00°		TCH 55	
1.2 NM		-3.3 NM	
CATEGORY A		B	
LPV DA	290/18	200 (200-½)	
LNAV/VNAV DA	360/24	270 (300-½)	
LNAV MDA	460/24	370 (400-½)	460/35 370 (400-¾)
CIRCLING	740-1	644 (700-1)	740-1¾ 740-2 644 (700-1¾) 644 (700-2)

SE-3, 05 SEP 2024 to 03 OCT 2024

SE-3, 05 SEP 2024 to 03 OCT 2024