

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 81921 W09A | APP CRS 089° | Rwy Idg TDZE Apt Elev | 5401 795 819 |
|--|------------------------|-----------------------------|---|


RNAV (GPS) RWY 9

RIVERSIDE MUNI (RAL)



⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Chino altimeter setting and increase all DA 46 feet and all MDA 60 feet and increase LPV all Cats and Circling Cats C and D visibility ¼ mile and LNAV/VNAV all Cats and LNAV Cats C and D visibility ½ mile. VDP and Baro-VNAV NA with Chino altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Circling NA for Cat D north of Rwy 9-27.

⚠ MISSED APPROACH: Climb to 6000 direct JIKUB and on track 121° to HDF VOR and hold, continue climb-in-hold to 6000.

| | | | | |
|----------------------|---------------------------------------|---|--------------------------|-------------------------|
| ATIS 128.8 | SOCAL APP CON 135.4 377.125 | RIVERSIDE TOWER * 121.0 (CTAF) 257.8 | GND CON 124.12 | UNICOM 122.95 |
|----------------------|---------------------------------------|---|--------------------------|-------------------------|

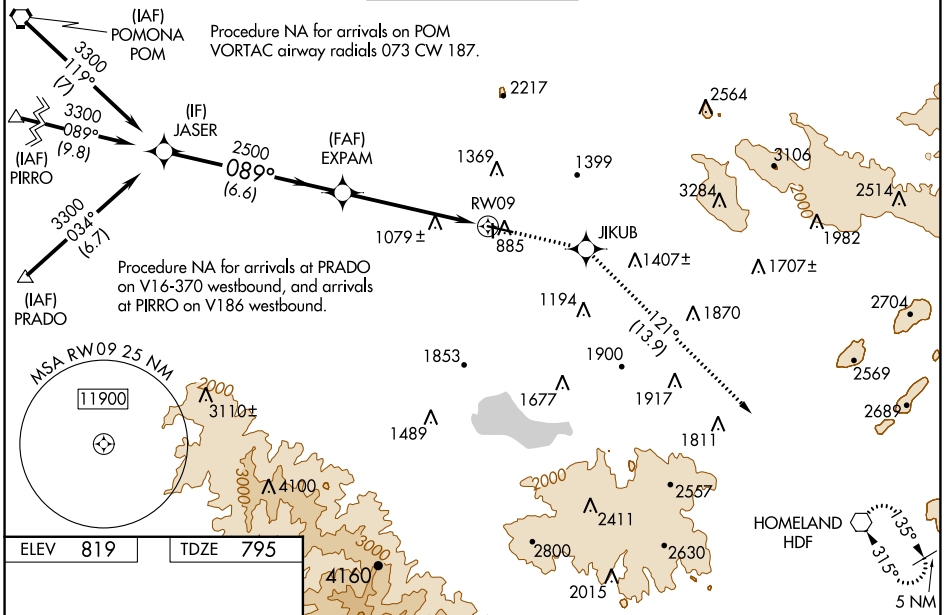

| | |
|----------|----------|
| ELEV 819 | TDZE 795 |
|----------|----------|

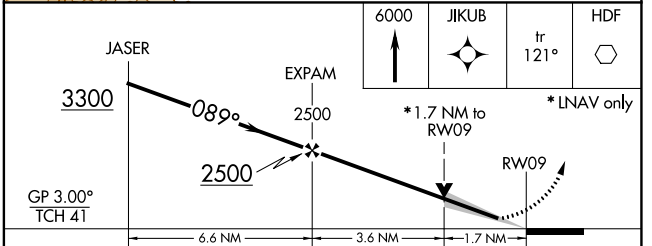

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-------------------------|------------------------|-------------------------|
| LPV DA | | 1127-1½ | 332 (400-1½) | |
| LNAV/VNAV DA | | 1461-2½ | 666 (700-2½) | |
| LNAV MDA | 1340-1 | 545 (600-1) | 1340-1½ | 545 (600-1½) |
| CIRCLING | 1340-1 521 (600-1) | 1680-1¼ 861 (900-1¼) | 1800-3 981 (1000-3) | 1960-3 1141 (1200-3) |

SW-3, 05 SEP 2024 to 03 OCT 2024

SW-3, 05 SEP 2024 to 03 OCT 2024