WAAS	APP CRS	Rwy Idg	5001
CH 45627	161°	TDZE	643
W16A		Apt Elev	647

RNAV (GPS) RWY 16
CHICAGO EXEC (PWK)

RNP APCH - GPS.

Circling Rwy 6, 12, 24, 30 NA at night.
Rwy 16 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

MISSED APPROACH: Climb to 1200 then climbing left turn to 2100 direct DEERE and hold.

ATIS	CHICAGO APP CON	EXECUTIVE TOWER ★	GND CON	CLNC DEL	CLNC DEL (When twr closed)	UNICOM
124.2	120.55 306.925	119.9 (CTAF) L	121.7	124.7	124.7	122.95

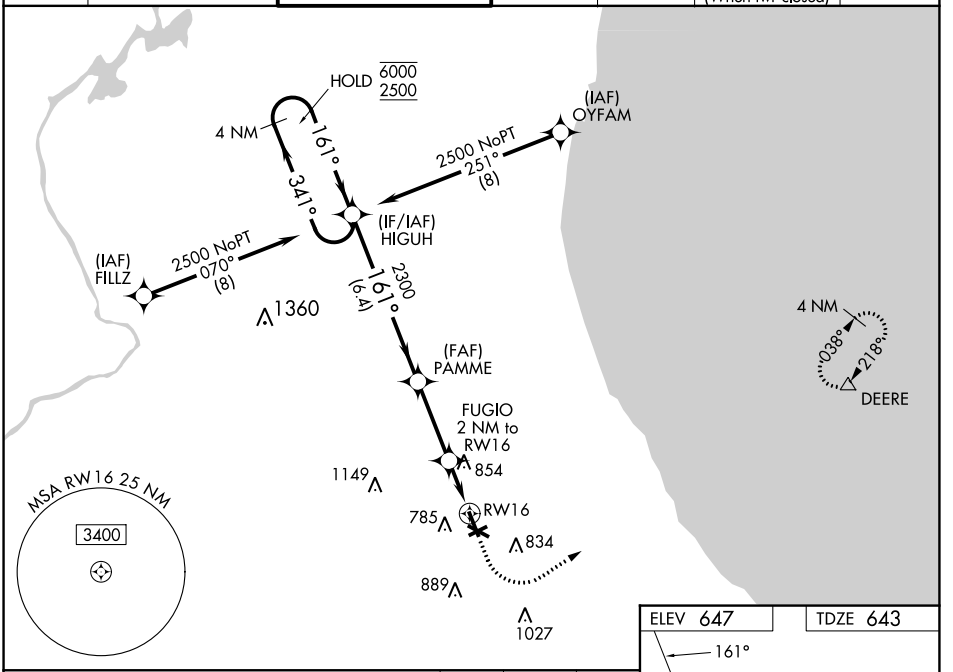

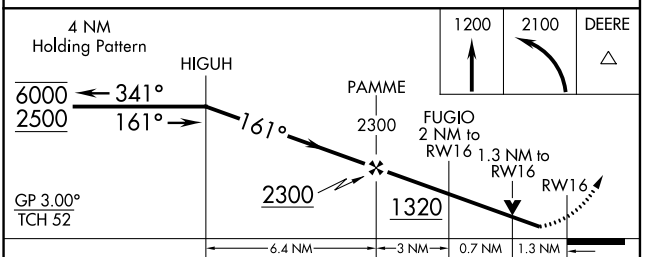

CATEGORY	A	B	C	D
LPV DA	927-⅞	284 (300-⅞)		
LNAV/VNAV DA	1083-1¼	440 (500-1¼)		
LNAV MDA	1120-1	477 (500-1)	1120-1⅜	477 (500-1⅜)
C CIRCLING	1140-1 493 (500-1)	1160-1 513 (600-1)	1200-1½ 553 (600-1½)	1460-2¾ 813 (900-2¾)

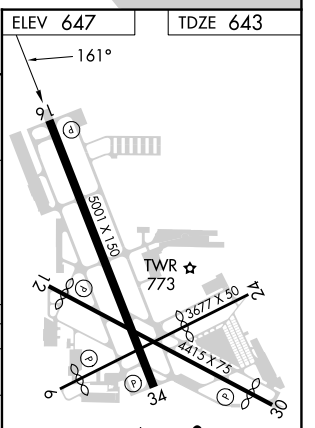

HIRL Rwy 6-24 and 16-34 L
MIRL Rwy 12-30 L
REIL Rwys 12 and 30
REIL Rwys 16 and 34 L
RLLS Rwy 16 L

EC-3, 05 SEP 2024 to 03 OCT 2024
EC-3, 05 SEP 2024 to 03 OCT 2024