RNAV (GPS) RWY 5

MOORE-MURRELL (MOR)

WAAS	APP CRS	Rwy Idg	5717
CH 78321	053°	TDZE	1313
W05A		Apt Elev	1313

RNP APCH - GPS.

NA

When local altimeter setting not received, use Mc Ghee Tyson altimeter setting and increase all MDA 140 feet, increase LP and LNAV Cats C/D visibility ⅜ SM, increase Circling Cat B visibility ¼ SM and Cat C visibility ½ SM. For inop MALSF, increase LP and LNAV Cats C and D visibility to 1⅜ miles. For inop MALSF, when using Mc Ghee Tyson altimeter setting, increase LP and LNAV Cats C and D visibility to 1¾ miles.

MALSF

MISSED APPROACH: Climb to 2000 then climbing right turn to 4200 direct YURSU and hold.

AWOS-3	KNOXVILLE APP CON	UNICOM
126.725	132.8 360.8	122.8 (CTAF) L

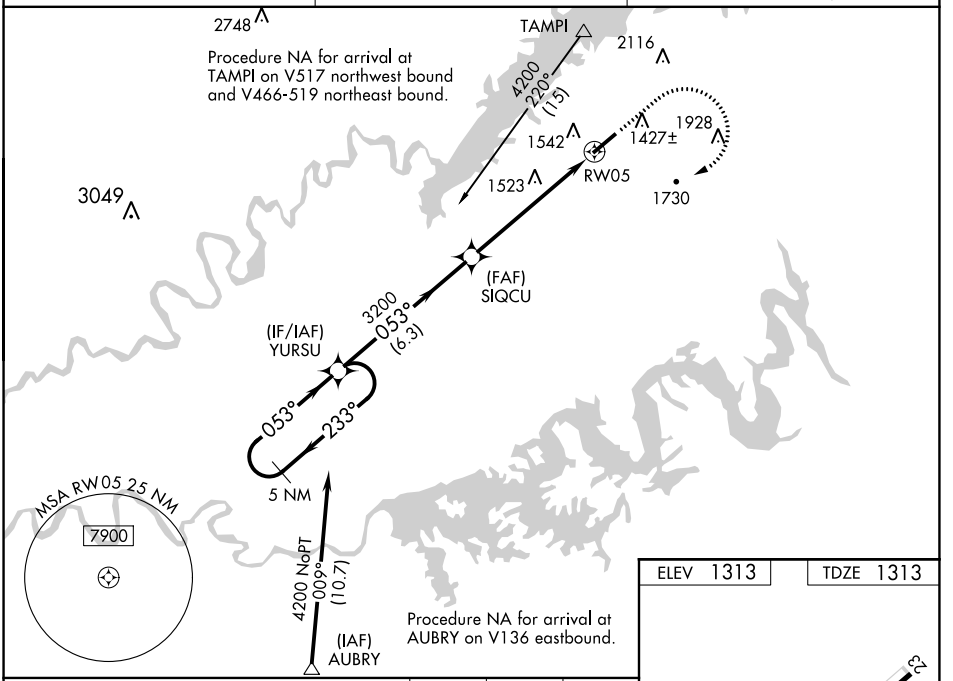

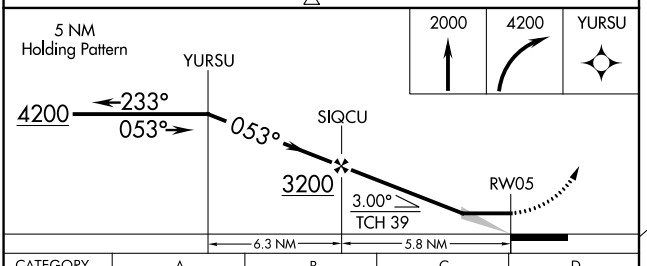

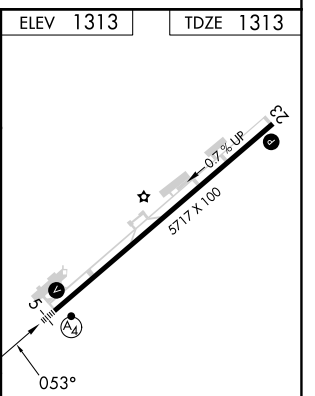

CATEGORY	A	B	C	D
LP MDA	1760-⅞ 447 (500-⅞)		1760-1 447 (500-1)	
LNAV MDA	1780-⅞ 467 (500-⅞)		1780-1⅛ 467 (500-1⅛)	
CIRCLING	1880-1 567 (600-1)	2020-1 707 (800-1)	2160-2½ 847 (900-2½)	2420-3 1107 (1200-3)

REIL Rwy 5-23
MIRL Rwy 5-23

SE-1, 05 SEP 2024 to 03 OCT 2024
SE-1, 05 SEP 2024 to 03 OCT 2024