

WAAS CH 77719 W20A	APP CRS 205°	Rwy Idg TDZE 884 Apt Elev 892
--	------------------------	---

RNAV (GPS) RWY 20

NEVADA MUNI (NVD)


RNP APCH - GPS.


NA

Circling NA to Rwy 13 and 31. Baro-VNAV and VDP NA when using Joplin altimeter setting. Rwy 20 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Joplin altimeter setting: increase LPV DA to 1249 feet; increase LNAV/VNAV DA to 1326 feet and all visibilities ¾ SM; increase all MDAs 120 feet and visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct KIFGE and hold.

AWOS-3PT 119.175	KANSAS CITY CENTER 125.55 327.0	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

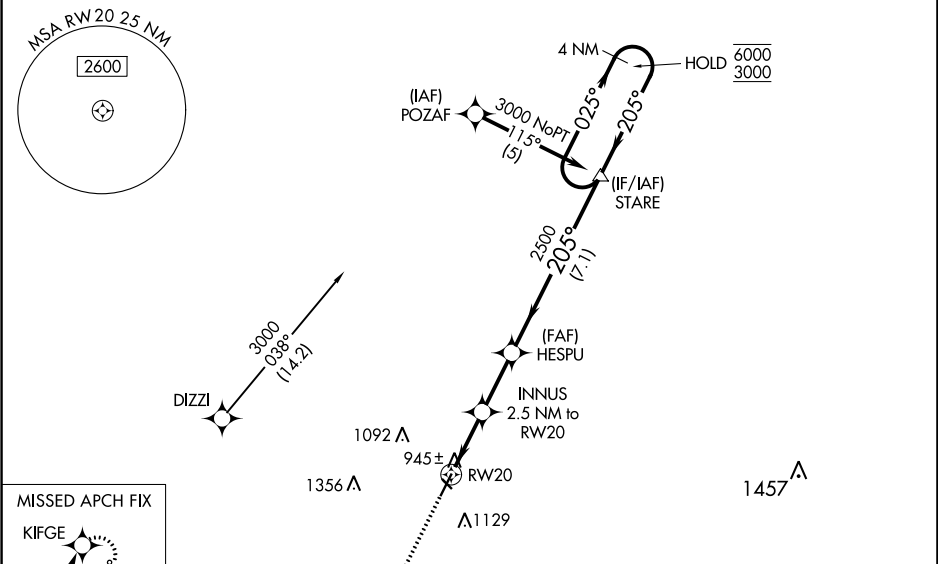

				
3000 	KIFGE 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).		
		STARE 4 NM Holding Pattern		
RW20 0.9 NM to RW20 1.6 NM 2.4 NM 7.1 NM		HESPU 2500 205° 2500 205° 6000 3000 GP 3.00° TCH 45		
INNUS 2.5 NM to RW20		1720		
CATEGORY	A	B	C	D
LPV DA	1139-1	255 (300-1)		NA
LNAV/VNAV DA	1216-1	332 (400-1)		NA
LNAV MDA	1200-1	316 (400-1)		NA
CIRCLING	1260-1 368 (400-1)	1440-1 548 (600-1)	1440-1½ 548 (600-1½)	NA

