

| | | |
|--|------------------------|--|
| LOC/DME I-TDF 108.7 Chan 24 | APP CRS 060° | Rwy Idg TDZE Apt Elev 5702 604 609 |
|--|------------------------|--|



ILS or LOC RWY 6

RALEIGH RGNL AT PERSON COUNTY (TDF)


▼ For inop ALS, increase S-LOC 6 visibility Cats C/D to 1½ SM and increase FIPR fix minimums
▲ NA S-LOC 6 visibility Cats C/D to 1 SM.

MALSR MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 021° and on RDU VORTAC R-356 to ALDAN INT/RDU 32.3 DME and hold, continue climb-in-hold to 3000.

| | | | |
|--------------------------|--|---------------------|---------------------------------|
| AWOS-3 126.725 | RALEIGH APP CON 132.35 256.9 | GCO 119.7 | UNICOM 122.7 (CTAF) 0 |
|--------------------------|--|---------------------|---------------------------------|

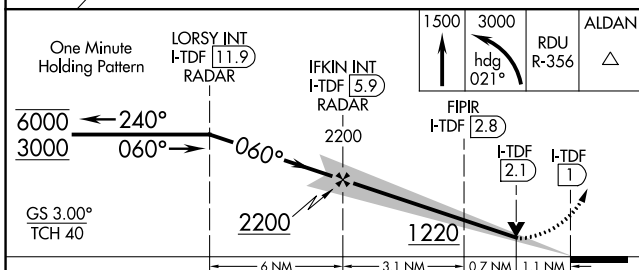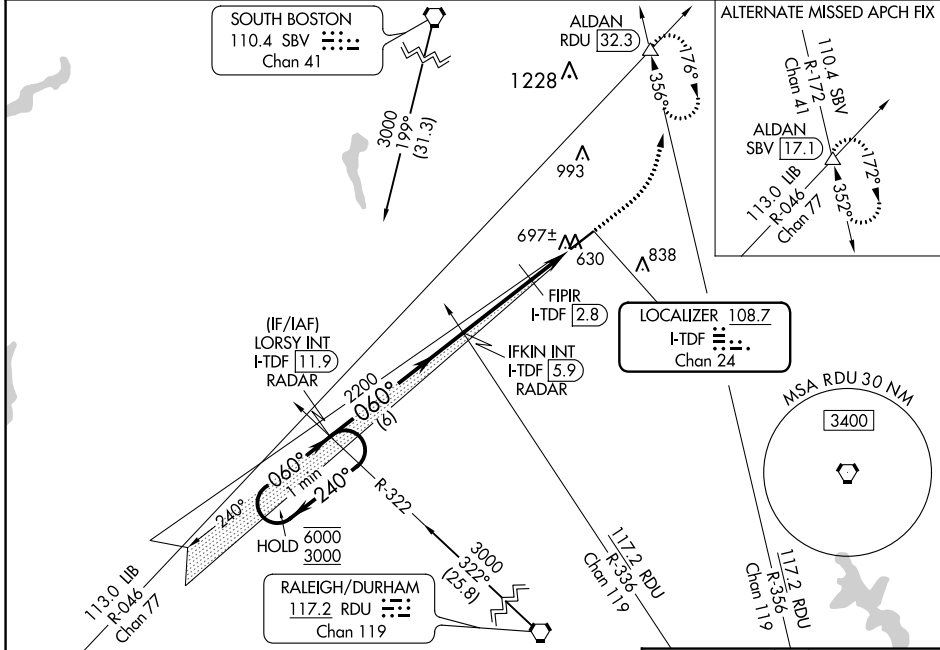

| | |
|----------|----------|
| ELEV 609 | TDZE 604 |
|----------|----------|



| CATEGORY | A | B | C | D |
|-------------------|-------------------|-------------|-------------|--------------|
| S-ILS 6 | 804-½ 200 (200-½) | | | |
| S-LOC 6 | 1220-½ | 616 (700-½) | 1220-¾ | 616 (700-¾) |
| CIRCLING | 1220-1 | 611 (700-1) | 1300-2 | 1300-2¼ |
| | | | 691 (700-2) | 691 (700-2¼) |
| FIPR FIX MINIMUMS | | | | |
| S-LOC 6 | 980-½ | 376 (400-½) | 980-¾ | 376 (400-¾) |
| CIRCLING | 1080-1 | 471 (500-1) | 1300-2 | 1300-2¼ |
| | | | 691 (700-2) | 691 (700-2¼) |

| | | | | | |
|-------------------|------|------|------|------|------|
| FAF to MAP 4.9 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 4:54 | 3:16 | 2:27 | 1:58 | 1:38 |

SE-2, 05 SEP 2024 to 03 OCT 2024

SE-2, 05 SEP 2024 to 03 OCT 2024