

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>82139</b><br><b>W12A</b> | APP CRS<br><b>125°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5102</b><br><b>2253</b><br><b>2271</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 12

TIOGA MUNI (D60)

RNP APCH.  
 ⚠ Circling NA to Rwy 3 and 21. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 2720 then climbing left turn to 5000 direct ERUVE and hold.


|                          |  |                      |
|--------------------------|--|----------------------|
| AWOS-3<br><b>118.575</b> | MINNEAPOLIS CENTER<br><b>127.6 279.6</b> | CTAF<br><b>122.9</b> |
|--------------------------|--|----------------------|

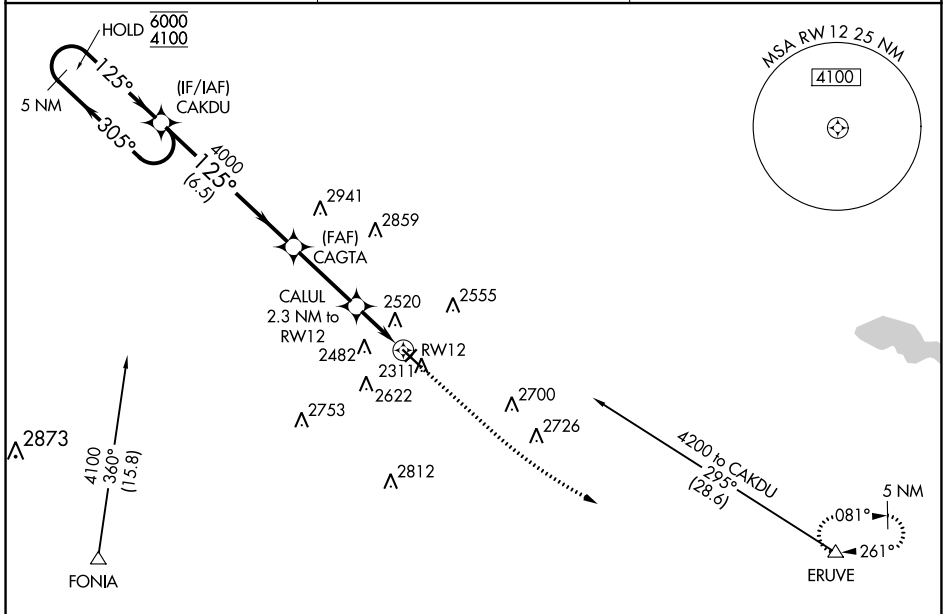


NC-1, 05 SEP 2024 to 03 OCT 2024

NC-1, 05 SEP 2024 to 03 OCT 2024

|                      |  |      |      |       |
|----------------------|--|------|------|-------|
| 5 NM Holding Pattern | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26). | 2720 | 5000 | ERUVE |
|----------------------|--|------|------|-------|

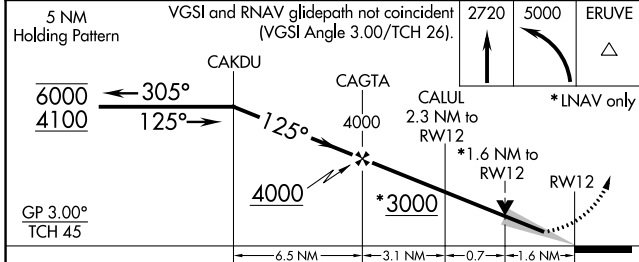

|      |      |      |      |
|------|------|------|------|
| ELEV | 2271 | TDZE | 2253 |
|------|------|------|------|

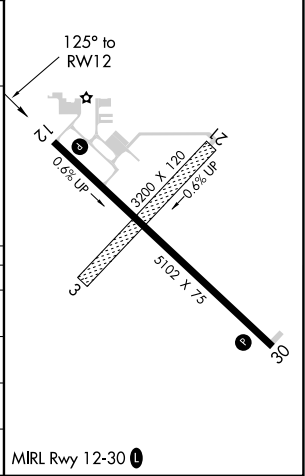

| CATEGORY          | A                     | B                     | C                     | D                       |
|-------------------|-----------------------|-----------------------|-----------------------|-------------------------|
| LPV DA            |                       | 2503-1                | 250 (300-1)           |                         |
| LNAV/VNAV DA      |                       | 2819-2                | 566 (600-2)           |                         |
| LNAV MDA          | 2780-1                | 527 (600-1)           | 2780-1½               | 527 (600-1½)            |
| <b>C</b> CIRCLING | 2820-1<br>549 (600-1) | 2980-1<br>709 (800-1) | 2980-2<br>709 (800-2) | 3000-2¼<br>729 (800-2¼) |