


APP CRS 353°	Rwy Idg 12000 TDZE 5354 Apt Elev 5434
------------------------	--

RNAV (RNP) Z RWY 34R

DENVER INTL (DEN)

▼ For uncompensated Baro-VNAV systems, procedure NA below -25°C (-13°F) or above 46°C (114°F). GPS required. For inoperative ALSF, increase RNP 0.10 all Cats visibility to RVR 6000 and RNP 0.20 all Cats visibility to 1½ mile and RNP 0.30 all Cats visibility to 2¼ mile. Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH:
 Climb to 6000 then climbing left turn to 10000 direct HYGEN and hold.

D-ATIS 125.6 379.9 (ARR) 134.025 (DEP)
--



DENVER APP CON 119.3 307.3 (N) 120.35 379.3 (S)

DENVER TOWER 135.3 351.95

GND CON 121.35 379.175 (W) 121.85 377.1 (E)

CLNC DEL 118.75

CPDLC

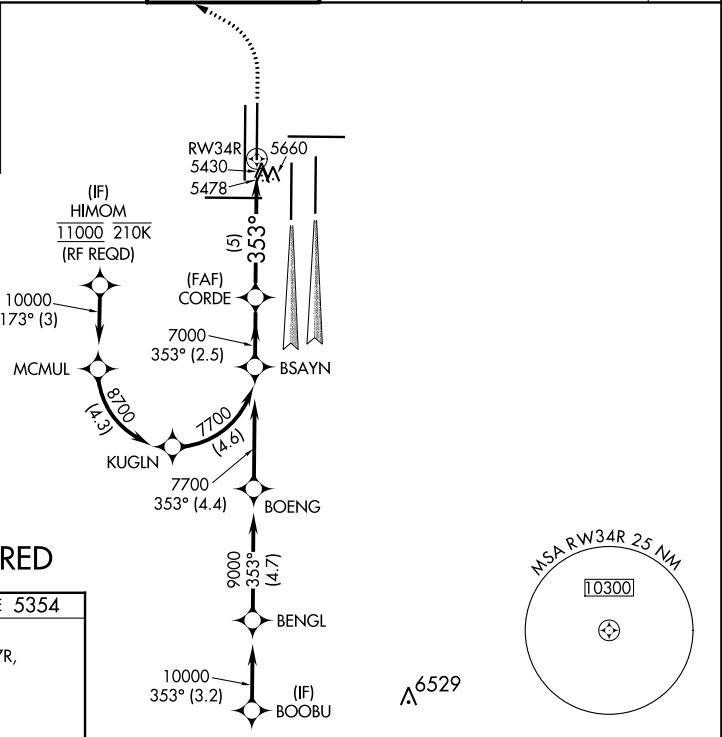



SW-1, 05 SEP 2024 to 03 OCT 2024

SW-1, 05 SEP 2024 to 03 OCT 2024

RADAR REQUIRED

ELEV 5434	D	TDZE 5354
-----------	----------	-----------

HIRL all Rwys
 TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

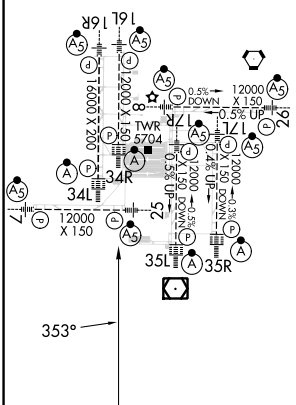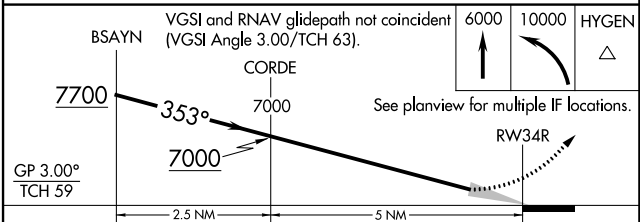CATEGORY	A	B	C	D
RNP 0.10 DA	5739/40 385 (400-¾)			
RNP 0.20 DA	5849/60 495 (500-1¼)			
RNP 0.30 DA	5980-1½ 626 (600-1½)			

AUTHORIZATION REQUIRED