



WAAS CH 53532 W36A	APP CRS 002°	Rwy Idg 5003 TDZE 235 Apt Elev 239
--	------------------------	---

RNAV (GPS) RWY 36

DELTA RGNL (DRP)


RNP APCH - GPS.	<p>Baro-VNAV and VDP NA when using West Memphis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use West Memphis altimeter setting; increase LPV DA to 503 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 755 feet; increase all MDAs 80 feet.</p>	<p>MISSED APPROACH: Climb to 3000 direct UHIMI and hold, continue climb-in-hold to 3000.</p>
-----------------	---	--

AWOS-3P 120.0	MEMPHIS CENTER 135.3 335.8	UNICOM 123.0 (CTAF)
-------------------------	--------------------------------------	-------------------------------

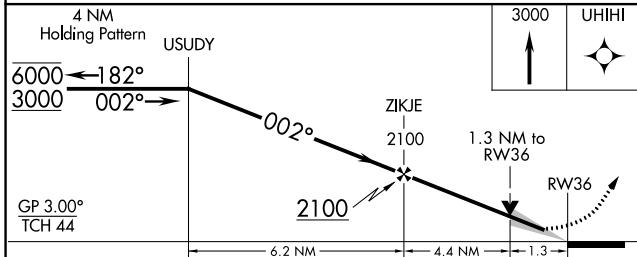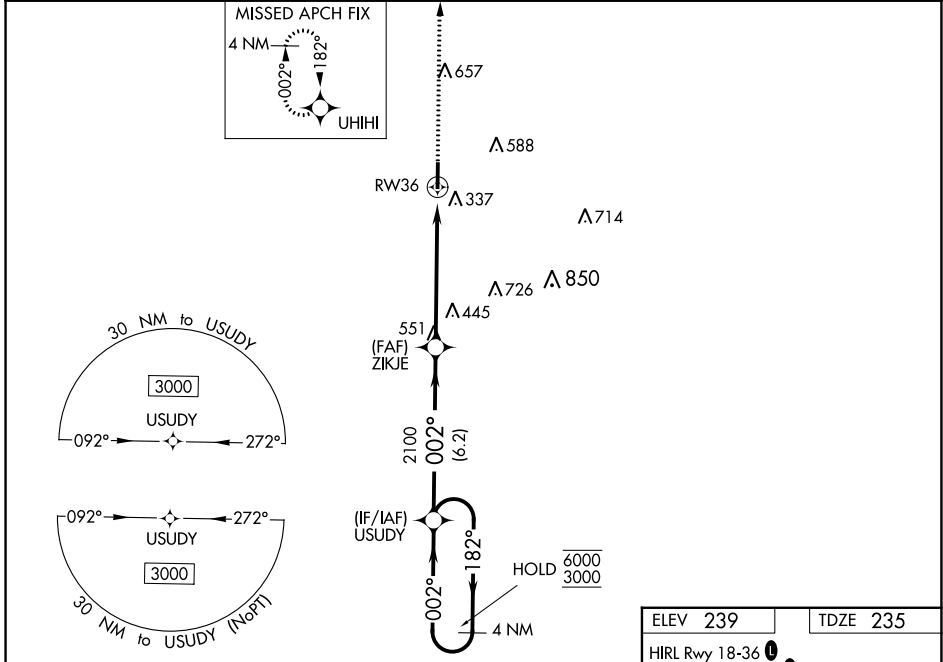

ELEV 239	TDZE 235
-----------------	-----------------

HIRL Rwy 18-36
REL Rwy 18 & 36

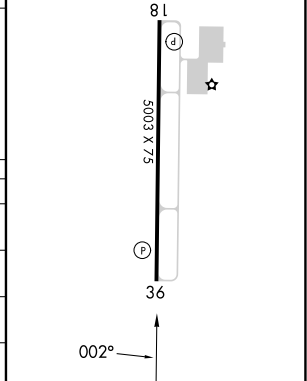

CATEGORY	A	B	C	D
LPV DA	435- ³ / ₄	200 (200- ³ / ₄)		NA
LNAV/VNAV DA	687-1 ³ / ₈	452 (500-1 ³ / ₈)		NA
LNAV MDA	700-1	465 (500-1)		NA
CIRCLING	760-1	521 (600-1)		NA

SC-1, 05 SEP 2024 to 03 OCT 2024

SC-1, 05 SEP 2024 to 03 OCT 2024