
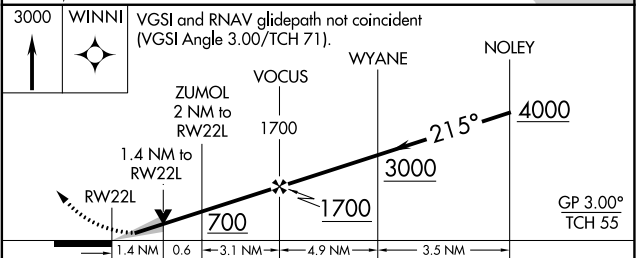
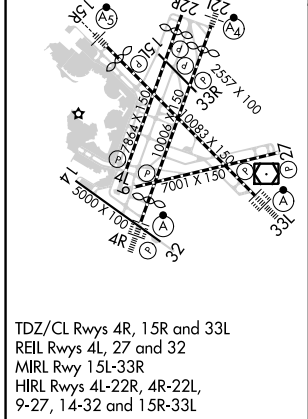


WAAS CH 45925 W22A	APP CRS 215°	Rwy Idg TDZE Apt Elev	8806 16 19
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) X RWY 22L

GENERAL EDWARD LAWRENCE LOGAN INTL (BOS)

RNP APCH - GPS.					MALSF	MISSED APPROACH: Climb to 3000 direct WINNI and hold.
▼ For inop ALS, increase LNAV/VNAV Cat D visibility to RVR 6000 and LNAV Cat D visibility to 1½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 43°C.						
D-ATIS 135.0	BOSTON APP CON 120.6 263.1	BOSTON TOWER 128.8 257.8 (WEST) 132.225 257.8 (EAST)		GND CON 121.75 121.9	CNLC DEL 121.65 257.8	CPDLC

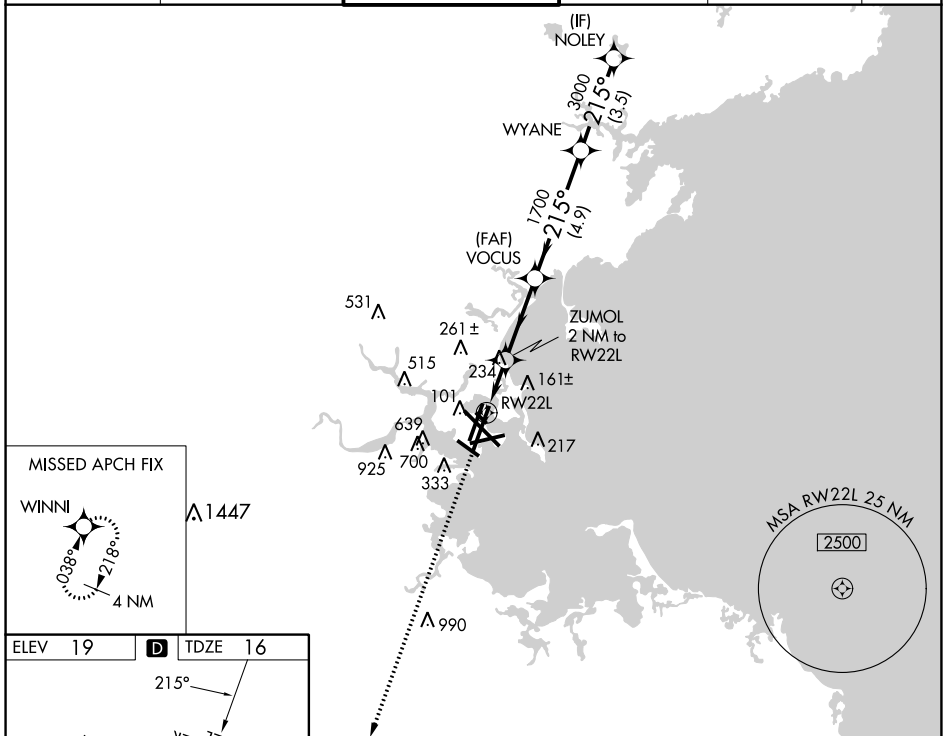

ELEV 19	D	TDZE 16		
TDZ/CL Rwy 4R, 15R and 33L REIL Rwy 4L, 27 and 32 MIRL Rwy 15L-33R HIRL Rwy 4L-22R, 4R-22L, 9-27, 14-32 and 15R-33L				
CATEGORY	A	B	C	D
LPV DA	216/40		200 (200-¾)	
LNAV/VNAV DA	408/50		392 (400-1)	
LNAV MDA	540/40	524 (600-¾)	540-1¼	524 (600-1¼)