WAAS	APP CRS	Rwy Idg	11245
CH 70643	273°	TDZE	653
W27D		Apt Elev	680

RNAV (GPS) RWY 27C

CHICAGO O'HARE INTL (ORD)

RNP APCH.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct UKUNE and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4 282.225	119.0 292.125	121.15 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)	121.6	

MISSED APCH FIX

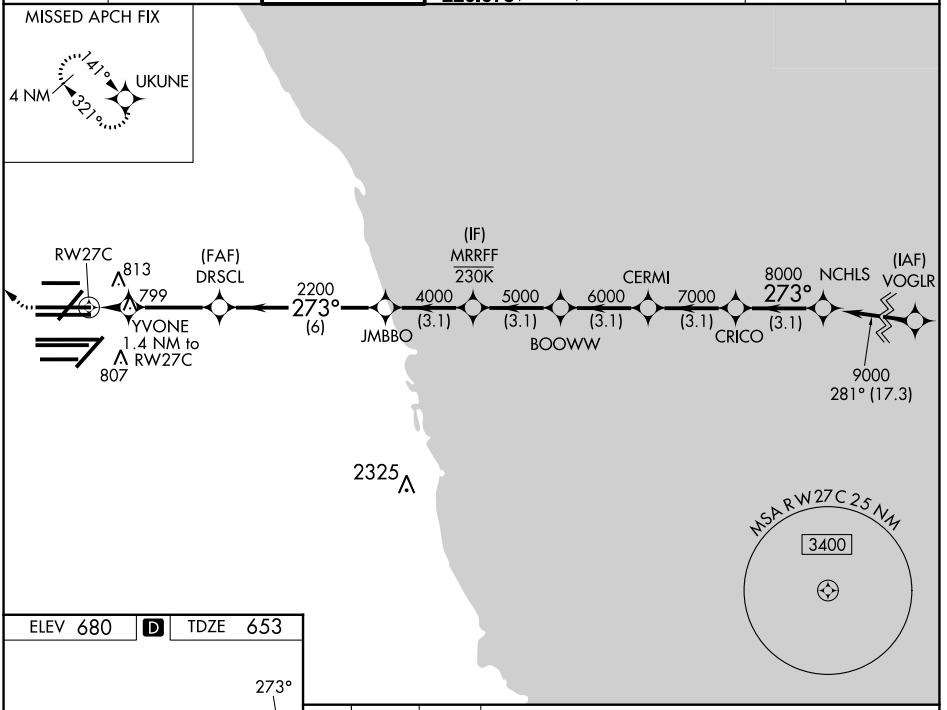

ELEV 680 D TDZE 653

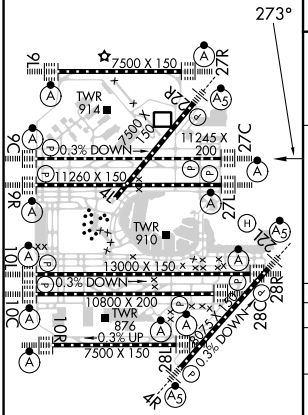

HIRL all Rwys
TDZ/CL all Rwys except 4L

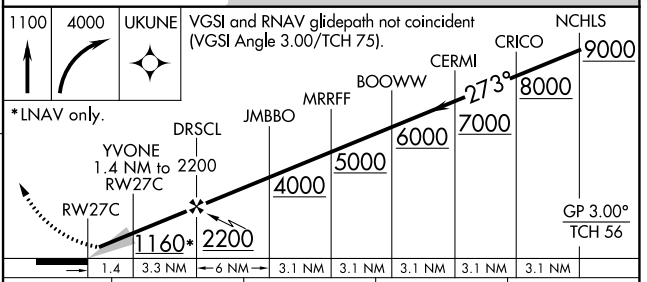

CATEGORY	A	B	C	D
LPV DA	853/18 200 (200-½)			
LNAV/VNAV DA	1086/40 433 (500-¾)			
LNAV MDA	1060/24 407 (400-½)		1060/40 407 (400-¾)	

EC-3, 03 OCT 2024 to 31 OCT 2024
EC-3, 03 OCT 2024 to 31 OCT 2024