


▼ VDP NA when using Orange altimeter setting. When local altimeter setting not received, use Orange altimeter setting and increase S-ILS 3 DA to 911 and all MDA 80 feet;

▲ increase S-LOC 3 JI/TIV fix minimums Cats C/D, S-LOC 3 Cats C/D, Circling Cats C/D, and JI/TIV fix minimums Circling Cats C/D visibility ¼ SM. For inop ALS when using Orange altimeter setting, increase S-ILS 3 all Cats visibility to ¾ SM, S-LOC 3 Cats C/D visibility to 2 SM, and S-LOC 3 JI/TIV fix minimums Cats C/D visibility to 1 ½ SM.

MALSR

MISSED APPROACH:
Climb to 2000 then
climbing right turn to
4000 direct GVE
VORTAC and hold.

ATIS 118.425	POTOMAC APP CON 132.85 323.125	CHARLOTTESVILLE TOWER ★ 124.5 (CTAF) 338.275	GND CON 121.9 338.275	UNICOM 122.95
------------------------	--	--	---------------------------------	-------------------------

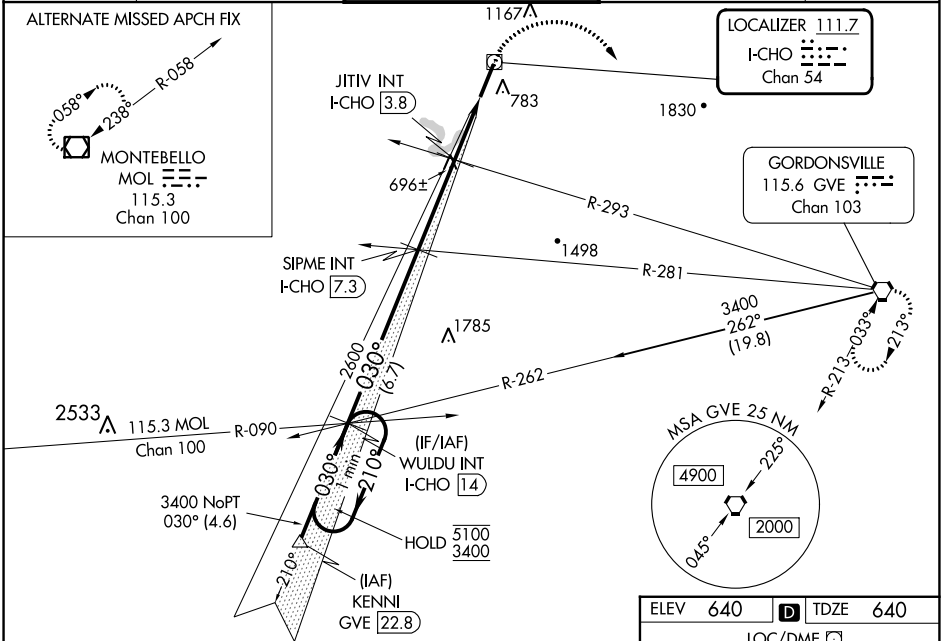

VGSI and ILS glidepath not coincident (VGSI Angle 3.00°/TCH 53).

One Minute Holding Pattern

CATEGORY	A	B	C	D
S-ILS 3	840-1 200 (200-1 2)			
S-LOC 3	1280-1 2	640 (700-1 2)	1280-1 3 8	640 (700-1 3 8)
CIRCLING	1280-1	640 (700-1)	1500-2 1 2	1500-2 3 4
JI/TIV FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 3	980-1 2	340 (400-1 2)	980-5 8	340 (400-5 8)
CIRCLING	1100-1	460 (500-1)	1500-2 1 2	1500-2 3 4

