WAAS	APP CRS	Rwy Idg	10002
CH 40128	249°	TDZE	736
W25A		Apt Elev	742

RNAV (GPS) RWY 25
CHICAGO/ROCKFORD INTL (RFD)

RNP APCH.

T A ASR Rwy 25 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 39°C.

MISSED APPROACH: Climb to 2500 direct RUDGE and hold.

ATIS	ROCKFORD APP CON	ROCKFORD TOWER	GND CON	CLNC DEL
127.6	121.0 327.0	118.1 290.375	121.9 290.375	119.25

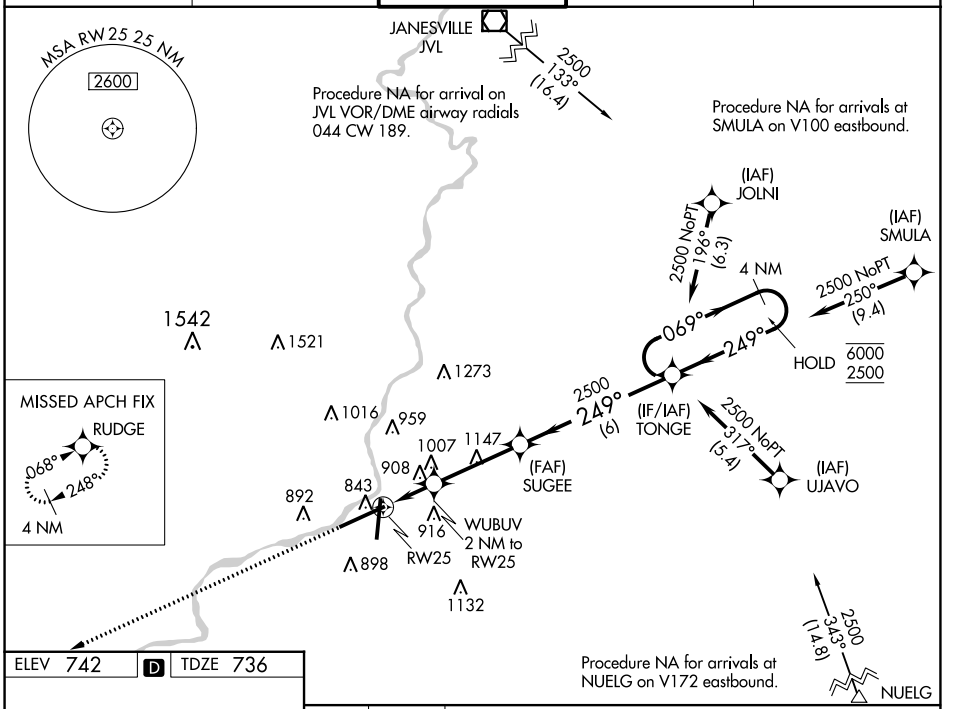

ELEV 742 | D | TDZE 736



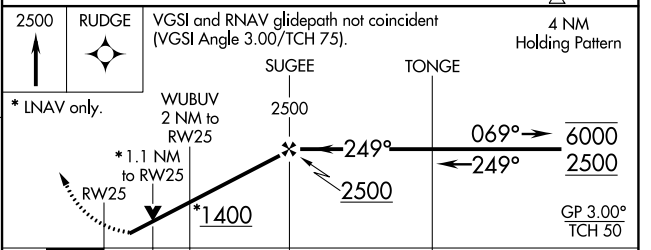

CATEGORY	A	B	C	D
LPV DA	986/50	250 (300-1)		
LNAV/VNAV DA	1191-1⅜	455 (500-1⅜)		
LNAV MDA	1160/55	424 (500-1)		
C CIRCLING	1220-1 478 (500-1)	1280-1 538 (600-1)	1320-1½ 578 (600-1½)	1460-2¼ 718 (800-2¼)

REIL Rwys 19 and 25
HIRL Rwys 1-19 and 7-25
TDZ/CL Rwys 1 and 7

EC-3, 03 OCT 2024 to 31 OCT 2024
EC-3, 03 OCT 2024 to 31 OCT 2024