




WAAS CH <b>53635</b> <b>W18A</b>	APP CRS <b>175°</b>	Rwy Idg <b>6080</b> TDZE <b>42</b> Apt Elev <b>46</b>
----------------------------------------	------------------------	-------------------------------------------------------------

# RNAV (GPS) RWY 18

CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.		MALSRL 	MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SOLON and hold.
<p><b>▼</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to 3/4 SM, all LNAV/VNAV visibilities to 7/8 SM, and LNAV Cat C, D, and E visibility to 1 3/4 SM.</p>			

ATIS <b>126.8</b>	CORPUS APP CON <b>120.9 348.725</b>	CORPUS TOWER <b>119.4 257.8</b>	GND CON <b>121.9 269.15</b>	CLNC DEL <b>118.55</b>
----------------------	----------------------------------------	------------------------------------	--------------------------------	---------------------------

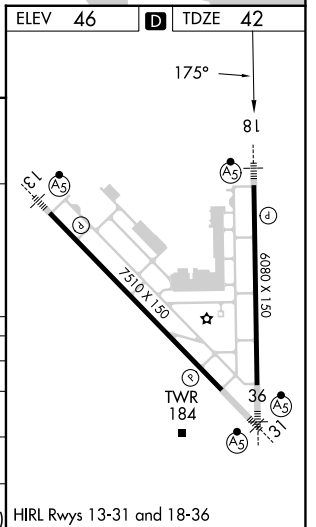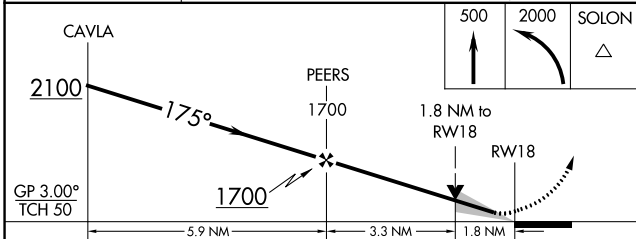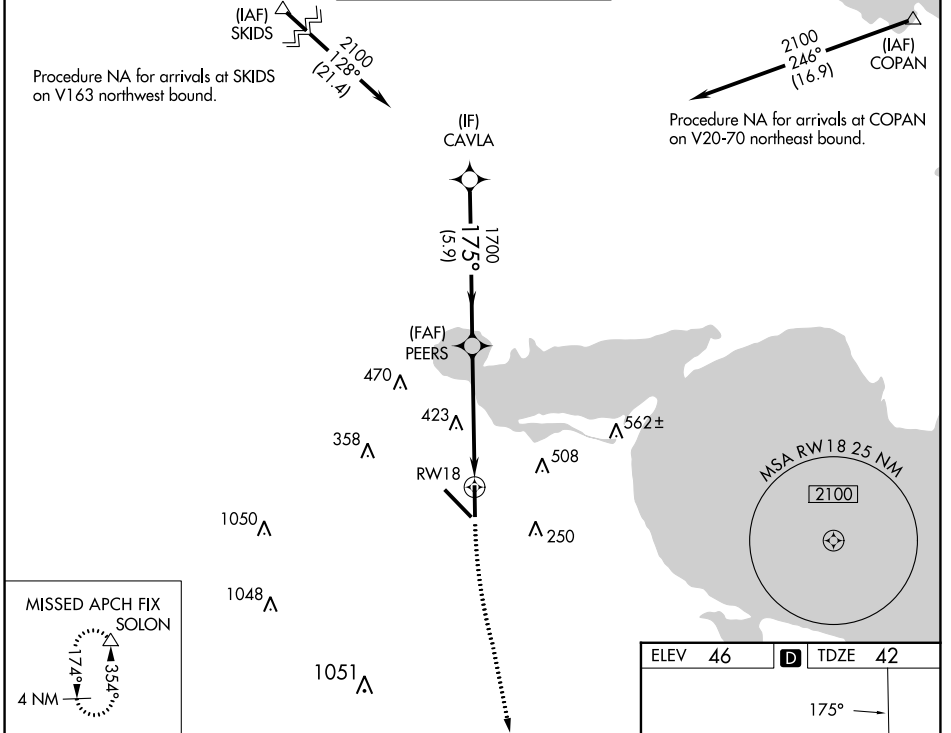

CATEGORY	A	B	C	D	E
LPV DA		242-1/2	200 (200-1/2)		
LNAV/VNAV DA		345-1/2	303 (300-1/2)		
LNAV MDA	660-1/2	618 (700-1/2)	660-13/8	618 (700-13/8)	
<b>C</b> CIRCLING	660-1 614 (700-1)	780-1 734 (800-1)	820-2 1/4 774 (800-2 1/4)	820-2 1/2 774 (800-2 1/2)	820-2 3/4 774 (800-2 3/4)

SC-3, 03 OCT 2024 to 31 OCT 2024

SC-3, 03 OCT 2024 to 31 OCT 2024