RNAV (GPS) RWY 33

AURORA MUNI (ARR)

WAAS	APP CRS	Rwy Idg	5503
CH 49105	328°	TDZE	705
W33A		Apt Elev	712

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop MALSR, increase LPV visibility to 1¼ SM all Cats, LNAV Cats A/B visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct UCORO and hold, continue climb-in-hold to 3000.

ATIS	CHICAGO APP CON	AURORA TOWER★	GND CON	CLNC DEL	UNICOM
125.85	133.5 349.0	120.6 (CTAF) L	121.7	121.7 (When tower closed)	122.95 123.5

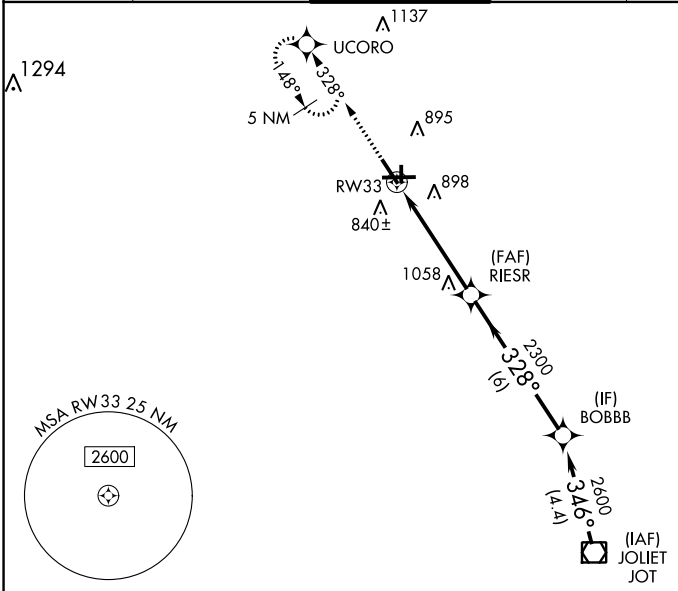

ELEV 712 TDZE 705

Procedure NA for arrival on JOT VOR/DME airway radials 314 CW 328.

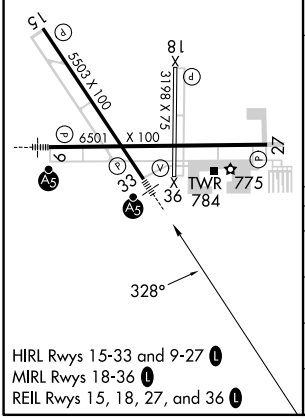

HIRL Rwys 15-33 and 9-27 L
MIRL Rwys 18-36 L
REIL Rwys 15, 18, 27, and 36 L

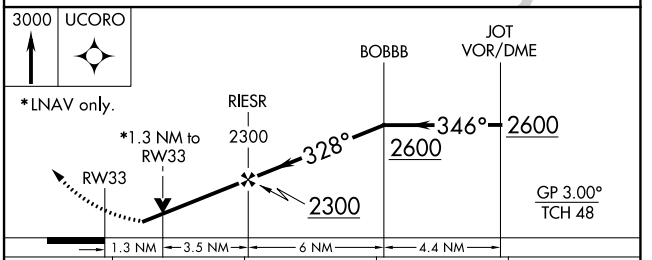

CATEGORY	A	B	C	D
LPV DA	1042-¾ 337 (400-¾)			
LNAV/VNAV DA	1194-1¼ 489 (500-1¼)			
LNAV MDA	1140-¾ 435 (500-¾)			1140-1 435 (500-1)
C CIRCLING	1200-1 488 (500-1)		1300-1½ 588 (600-1½)	1320-2 608 (700-2)

EC-3, 03 OCT 2024 to 31 OCT 2024
EC-3, 03 OCT 2024 to 31 OCT 2024