

WAAS CH 99306 W32A	APP CRS 316°	Rwy Idg 6021 TDZE 323 Apt Elev 327
--	------------------------	---

RNAV (GPS) RWY 32

EAST GEORGIA RGNL (SBO)

T Baro-VNAV and VDP NA when using Vidalia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F).

A When local altimeter setting not received, use Vidalia altimeter setting and increase all DA to 638 feet and all MDA 80 feet; increase LNAV Cats C/D visibility ½ SM, and Circling Cats C/D visibility ¼ SM. DME/DME RNP-0.3 NA. Rwy 32 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 800 then climbing left turn to 2500 direct WINSI and hold.

AWOS-3 133.375	ATLANTA CENTER 127.95 343.75	UNICOM 122.975 (CTAF) 0
-------------------	---------------------------------	----------------------------

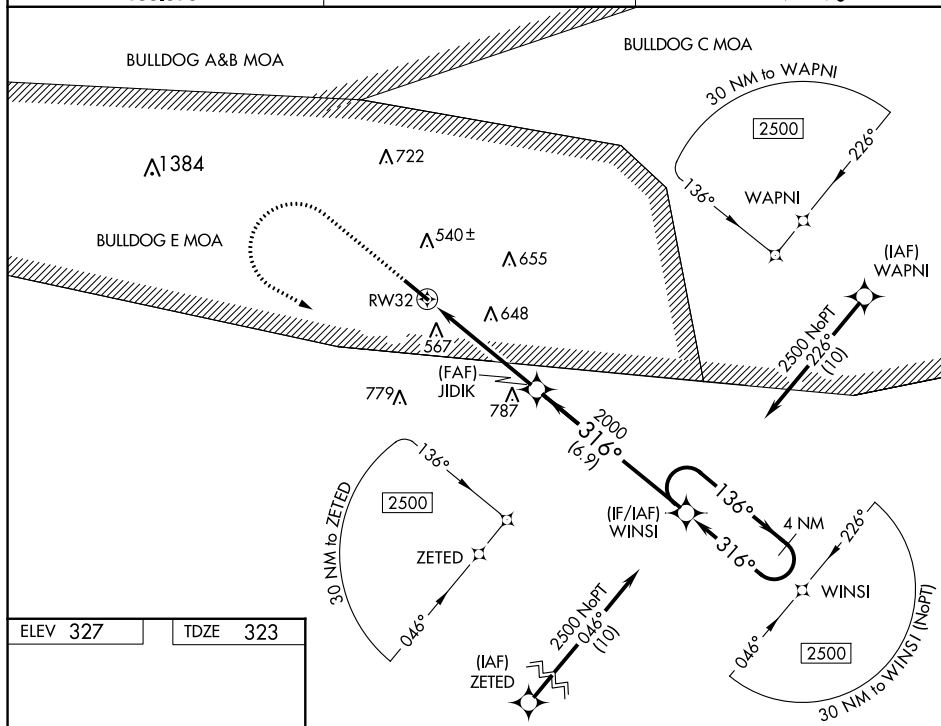


Diagram illustrating the HIRL Rwy 14-32 and its associated instrument approach procedure.

Runway Information:

- Runway: 14-32
- Dimensions: 6021 x 100
- Heading: 316°

Approach Procedure:

- WINSI** (Waypoint)
- JIDIK 2000** (Waypoint)
- RW32** (Runway 32)
- 4 NM Holding Pattern**
- GP 3.00° TCH 57** (Glide Path and Threshold)

Approach Procedure Details:

- 1.3 NM to RW32**
- 3.8 NM**
- 6.9 NM**

Approach Procedure Table:

CATEGORY	A	B	C	D
LPV DA	573-1	250 (300-1)		
RNAV/ VNAV DA	573-1	250 (300-1)		
RNAV MDA	780-1	457 (500-1)	780-1 $\frac{3}{8}$	457 (500-1 $\frac{3}{8}$)
CIRCLING	900-1 573 (600-1)	920-1 593 (600-1)	1000-2 673 (700-2)	1000-2 $\frac{1}{4}$ 673 (700-2 $\frac{1}{4}$)