

APP CRS 244°	Rwy Idg 5001
	TDZE 150
	Apt Elev 150

RNAV (GPS) RWY 24

GEORGE DOWNER (AIV)


NA DME/DME RNP-0.3 NA. Use Tuscaloosa altimeter setting; when not received, use Columbus/W Point/Starkville altimeter setting and increase all MDAs 20 feet, and Circling Cat C visibility 1/4 SM. Procedure NA at night. Rwy 24 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 3000 direct ZESLO and hold.


TCL ASOS
132.825

COLUMBUS APP CON
135.6 323.275

UNICOM
122.8 (CTAF) 0

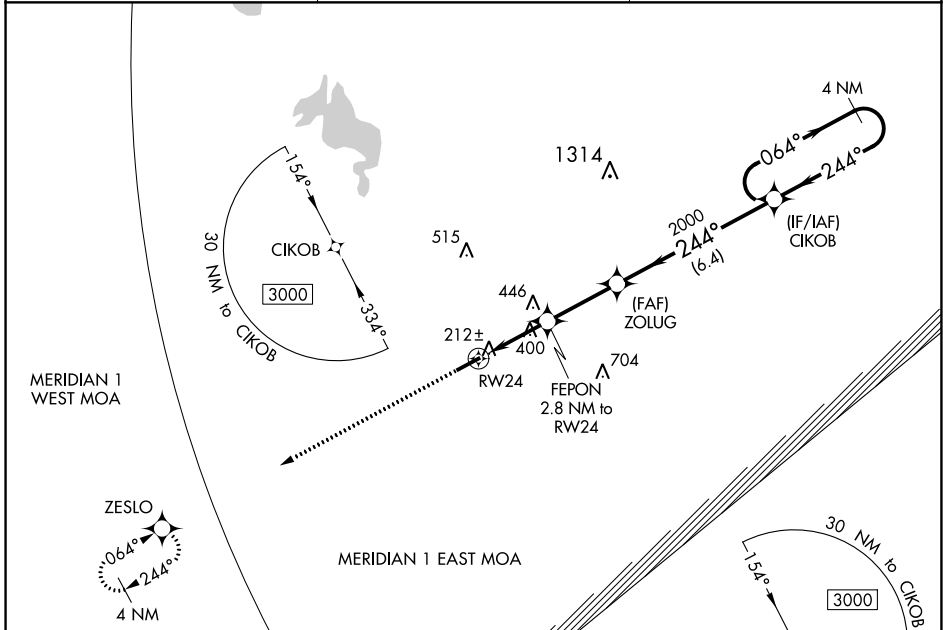

ELEV 150	TDZE 150
----------	----------

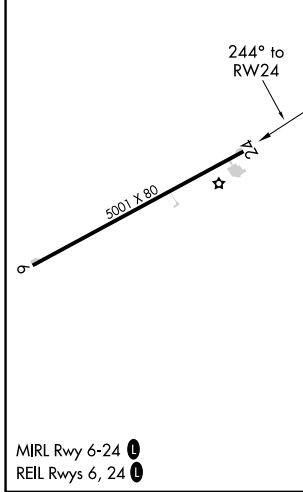

Visual Segment - Obstacles.	3000	ZESLO	Visual Segment - Obstacles.		CIKOB	4 NM Holding Pattern
	FEPON 2.8 NM to RW24		ZOLUG	CIKOB 4 NM Holding Pattern		
RW24		1100	2000	3000		
2.8 NM		2.8 NM	6.4 NM			
CATEGORY	A	B	C	D		
LNAV MDA	740-1	590 (600-1)	740-1 3/4	590 (600-1 3/4)		
C CIRCLING	740-1	590 (600-1)	820-1 3/4	900-2 1/2		
			670 (700-1 3/4)	750 (800-2 1/2)		

SE-4, 03 OCT 2024 to 31 OCT 2024

SE-4, 03 OCT 2024 to 31 OCT 2024