

CONTINUED FROM PRECEDING PAGE

(VL) (DH) VOR/DME 114.65 LWL Chan 93(Y) N41°08.69' W114°58.65' 106° 3.0 NM to fld.
5888/17E. NOTAM FILE RNO.

VOR unusable:

000°-060° byd 30 NM blo 12,000'
061°-100° byd 30 NM
101°-140° byd 25 NM blo 11,000'
101°-140° byd 34 NM blo 16,000'
101°-140° byd 40 NM
145°-159° byd 40 NM
170°-219° byd 10 NM
310°-329° byd 40 NM
330°-350° byd 10 NM
351°-359° byd 25 NM blo 13,000'
351°-359° byd 34 NM blo 17,500'
351°-360° byd 40 NM

DNE unusable:

000°-060° byd 10 NM
061°-100° byd 30 NM
101°-140° byd 25 NM blo 16,000'
170°-219° byd 10 NM
330°-350° byd 10 NM
351°-359° byd 25 NM blo 13,000'
351°-359° byd 34 NM blo 17,500'

WILSON CREEK N38°15.01' W114°23.65' NOTAM FILE RNO.

LAS VEGAS

(VH) (H) VORTAC 116.3 ILC Chan 110 167° 27.8 NM to Lincoln Co. 9318/16E.

H-3D, L-9B

RCO 122.1R 116.3T (RENO RADIO)

RCO 122.6 (RENO RADIO)

WINNEMUCCA MUNI (WMC)(KWMC) 5 SW UTC-8(-7DT) N40°53.80' W117°48.35'

KLAMATH FALLS

4308 B TPA-5108(800) NOTAM FILE WMC

H-3C, L-11B

RWY 14-32: H7000X100 (ASPH) S-75, D-125, 2S-159, 2D-200

IAP, AD

MIRL

RWY 14: REIL. PAPI(P2L)—GA 3.0° TCH 40'. P-line.

RWY 32: REIL. PAPI(P2L)—GA 3.0° TCH 40'.

RWY 02-20: H4800X75 (ASPH) S-28 MIRL

RWY 20: REIL. PAPI(P2L)—GA 3.0° TCH 40'. Road.

SERVICE: S2 FUEL 100LL, JET A OX 3, 4 LGT MIRL Rwy 14-32
preset low ints, to increase ints ACTIVATE—CTAF.

AIRPORT REMARKS: Attended Nov-May 1600-0100Z†, Jun-Oct Mon-Fri
1500-0200Z†. Aft hrs or emerg call (775) 304-5885. Call FBO for
current rwy conditions in winter months. Mountains in SW quadrant.
Full strength pavement areas include N 1000 ft of parallel twy (Rwy
14-32 to Twy A); W 1000 ft of Twy A; 600 ft of N/S twr (from Twy A).

AIRPORT MANAGER: 775-623-6333


WEATHER DATA SOURCES: ASOS 120.175 (775) 625-2200.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.3 (RENO RADIO)

Ⓡ SALT LAKE CENTER APP/DEP CON 132.25

CLEARANCE DELIVERY PHONE: For CD if una to ctc on FSS freq, ctc Salt Lake
ARTCC at 801-320-2568.

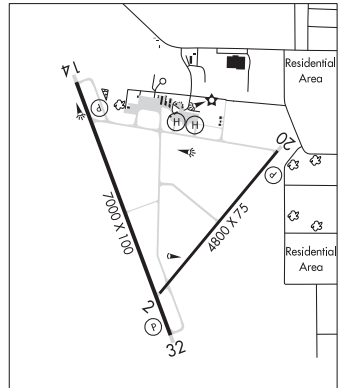

CONTINUED ON NEXT PAGE

