

(DORRL2.DORRL) 24081

AL-257(FAA)

MIAMI INTL (MIA)
MIAMI, FLORIDA

DORRL TWO DEPARTURE (RNAV)

MIAMI DEP CON
119.45 290.325
D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(Rwys 8L/8R, 12, 26L/26R)
121.8 348.6
(Rwys 9, 27, 30)
127.5 348.6
MIAMI TOWER
118.3 256.9

**TOP ALTITUDE:
ASSIGNED BY ATC**

RNAV 1 - DME/DME/IRU or GPS.




RADAR required.

TAKEOFF MINIMUMS

Rwys 8L/R, 9, 12, 26L/R, 27, 30:

Standard with minimum climb of 500'/NM to 520.

NOTE: For turbo-props/props filed at or above 13000.

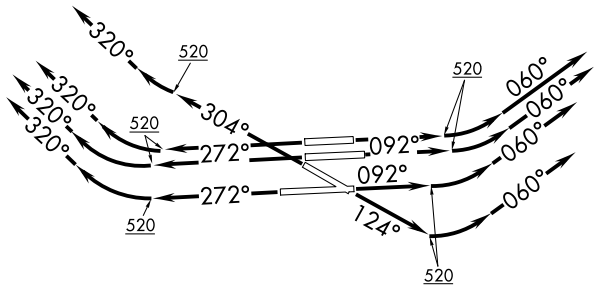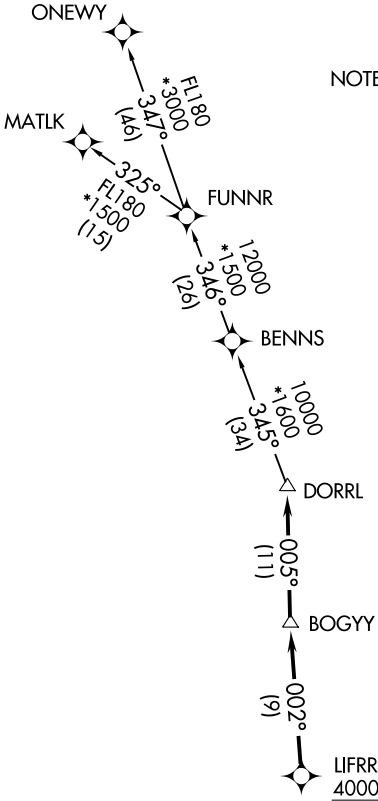

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 31 OCT 2024 to 28 NOV 2024

SE-3, 31 OCT 2024 to 28 NOV 2024

DORRL TWO DEPARTURE (RNAV)

(DORRL2.DORRL) 21MAR24

MIAMI, FLORIDA
MIAMI INTL (MIA)